

LAW AND FINANCE MEETING
Tuesday, December 8, 2015
7:00 P.M., Council Chambers
225 East Weatherspoon St., Sanford, NC

The Law and Finance Committee met on Tuesday, December 8, 2015, in the Council Chambers of City Hall, located at 225 East Weatherspoon Street, at 7:00 P.M. The following people were present:

Law and Finance Committee:

Mayor T. Chet Mann	Council Member Byron Buckels
Council Member James Williams	Council Member Jimmy Haire
Council Member Rebecca Wyhof	Council Member Norman Charles Post, III
Council Member Charles Taylor	City Manager Hal Hegwer
City Attorney Susan Patterson	City Clerk Bonnie Davis

Mayor Chet Mann called the meeting to order.

Consider Renewal of 2016 Taxicab Operators' Licenses – (Exhibit A)

Detective Sergeant Vinnie Frazer presented a list of four taxicab companies that submitted applications to renew their 2016 Taxicab Operator's License, pursuant to Sanford City Ordinance 10-366. Detective Sergeant Frazer explained that applications were received from the following companies: Fleming Transportation requesting to operate three companies (Service Cab, American Yellow Cab and Pronto Taxi), and Juana M. Guillen requesting to operate D.A.Y. Taxi Service. Detective Sergeant Frazer explained that a criminal background check had been completed on the owners of the cab companies, complying with State and Federal law, and that no violations were found that would prevent the listed owners from being issued a license to operate a taxicab company within the City limits.

Mayor Mann asked Detective Sergeant Frazer if he had received any interest from UBER. Mayor Mann commented that UBER appeared to be a growing trend in larger cities, but that Sanford may not be ready for this service.

Detective Sergeant Frazer said that he had not received any interest from UBER.

Council Member Taylor commented that a bill was passed in the Legislature, assessing a \$5,000 fee for participation, which could be a factor in the delay of a UBER type lift system in Sanford.

Council Member Haire asked Detective Sergeant Frazer who he was dealing with in regards to Fleming Transportation, since Lois Fleming was out of state at the present time.

Detective Sergeant Frazer said that Lois Fleming had the remainder of this week to submit the paperwork for the inspection renewal. He said that the Ordinance required that the owner must be present for the renewal inspection; therefore if she could not be present, she would have to make other arrangements for the renewal inspection process.

Council Member Buckels asked if the taxicab owners had a certain amount of time to make the vehicles operational. Detective Sergeant Frazer replied that the owners usually had more than one vehicle so that if one should break down, the other could be inspected for use.

Consider Capital Project Ordinance Amendment – Sidewalk Improvement Bond Project (NO. B1401) – (Exhibit B)

City Engineer Paul Weeks presented the Ordinance Amendment for the Sidewalk Improvement Bond Project (No. B1401), explaining that the request was to move funds from one line item to another within the Project Ordinance; that no additional funds were requested.

Consider Entering Into an Access Agreement with Stanley Black and Decker, Inc. for the Installation, Maintenance, and Periodic Sampling of Monitoring Wells – (Exhibit C)

City Engineer Paul Weeks explained that periodically the City of Sanford was asked to enter into an access agreement with firms that monitor ground water. He said that Stanley Black & Decker had submitted an agreement to monitor the ground water on City property identified as the non-paved portion of Keith Drive right-of-way. Mr. Weeks said this was a routine access agreement.

Consider Authorizing Resolution by Governing Body of the Applicant - (Exhibit D)

Public Works Administrator Laura Spivey said that the North Carolina Department of Commerce has an Economic Infrastructure Program under its Rural Economic Development Division and that the grants are to aid eligible units of government in financing the cost of infrastructure activities needed to create jobs. Mrs. Spivey said that the City of Sanford has received grant funds from the North Carolina Department of Commerce for infrastructure projects in the past. The Public Works Department will submit an application for grant funds to assist Comfort First Heating and Cooling, Inc. with a waterline extension at the corner of Lark Lane and Jefferson Davis Highway and US #1. Mrs. Spivey said that the City of Sanford would need to extend approximately 1,900-feet of water line; the approximate cost of the water line is \$120,000. Mrs. Spivey said that the grant application would be for \$100,000 and the remaining \$20,000 cost would be the City's local match. She said that the North Carolina Rural Infrastructure Grant Program would require Comfort First Heating and Cooling, Inc. to create twenty jobs, at \$5,000 per job, within an eighteen-month period and retain the jobs for approximately six months. She said that if the company failed to comply, they would be responsible to pay back the grant funding. Mrs. Spivey said that this resolution is to initiate the grant application process.

City Manager Hal Hegwer commented that there were few opportunities for these types of grants that are tied to job creation.

Consider Modified Rosemount-McIver Park Guidelines - (Exhibit E)

Planner II Liz Whitmore presented the revised guidelines for the Rosemount-McIver Park Historic District and reviewed the major changes with Council. Mrs. Whitmore said the revised document was reviewed by the current Historic Preservation Commission, and that there were numerous citizen input meetings and that all property owners in the Rosemount-McIver Park Historic District were notified of the revised guidelines. She said the revised guidelines were posted on the City's website for public review and they were also submitted to (SHPO) State

Historic Preservation Office, for their review and that SHPO's comments were incorporated into the guidelines.

Mrs. Whitmore extended gratitude to all of the Citizens and staff who participated in the revision of these guidelines. She also thanked the members of the Historic Preservation Commission, City Council liaison Sam Gaskins, Attorney Susan Patterson, Staff Ann Sears and Long Range Transportation Planner David Montgomery for the support they provided.

Council Member Haire referenced Page 26, Item 2 of the Guidelines, which describes the replacement of original glass with like-kind material. He commented that in this age, it almost seemed absurd not to allow vinyl replacement windows. He said the largest historic district in the United States is River Street in Savannah Georgia and that the businesses in this area have vinyl replacement windows. He said that this document will not allow vinyl replacement windows in the Rosemount-McIver Historic District.

Mrs. Whitmore said that if a resident of the Rosemount-McIver Historic District had original windows in their dwelling and wanted to replace them with vinyl windows that would be considered a major and would require a public hearing before the Historic Preservation Commission. She said this could not be approved at staff level. She commented that the Historic Preservation Commission had approved vinyl windows in the past.

Council Member Taylor commented that he was concerned about consistency, and asked if this document was designed to accomplish the consistency that has been missing in some Historic Preservation Commission's interpretations in the past.

Mrs. Whitmore said that the current policy provides for more than one set of eyes to review Minor renovations. She said the current Historic Preservation Commission was a good Board and that they were very reasonable and fair.

Council Member Taylor asked if there were any properties in the Rosemount-McIver Historic District that were not in compliance with the current parking requirements for driveway widths.

Mrs. Whitmore said that existing driveways were grandfathered in and the owner would not be required to retro-fit; however, if the owner wanted to make the driveway larger, then they would have to comply with the current regulations.

Council Member Haire commented on the condition of the dwelling located at the intersection of Horner Boulevard and Weatherspoon Street, known as the "Poe" home. He asked Mrs. Whitmore how this structure was allowed to get into such a state of disrepair when these guidelines are in place.

Mrs. Whitmore replied that the property owners were responsible for the disrepair of properties. She said her understanding was that the family who owned this structure would have to obtain an additional loan to make the necessary repairs to this structure and that they would have to pay more than the house is worth. She said the dwelling was in compliance with Code

Enforcement and that the Historic Preservation Commission could not force the homeowner to make any repairs.

Mayor Mann commented that the structure is vacant and that hopefully someone would come along who could make the necessary repairs to the structure.

Mayor Mann voiced appreciation to the Historic Preservation Commission, the Citizen Committee and Mayor Pro Tem Gaskins and staff for their hard work in developing the Rosemount-McIver Park Historic District Guidelines. Mayor Mann commented that this was a great document and that it exhibited six years of work. He said he appreciated the efforts to preserve the neighborhood.

Council Member Taylor asked Mrs. Whitmore if the changes to the Rosemount-McIver Historic District Guidelines were recommendations from SHPO.

Mrs. Whitmore replied that the changes were recommendations made from the citizen appointed board. She said that the changes recommended from SHPO were incorporated in the changes but that they were mostly typographical or formatting recommendations.

Consider Ordinance Amending the Annual Operating Budget for FY 2015-2016 for the General Fund - (Exhibit F)

Financial Services Director Beth Kelly explained that this amendment would appropriate \$1,500 in miscellaneous revenue to the Administration Department to pay for temporary help due to an employee being on leave. She asked for a consensus in order to move forward with this and that it would be on the Consent Agenda for approval at the December 16, 2015 Council Meeting.

Mayor Mann asked the Council for a consensus for staff to move forward with the appropriation of \$1,500 in miscellaneous revenue to the Administration Department to pay for temporary employment. The consensus of Council was to move forward with the ordinance.

Other Business

Council Member Taylor made mention of the tree located in front of Stanley's Western Auto. He said that the tree is within two inches of touching the awning. He commented that he hoped staff was considering how the current work was affecting the existing awnings.

Council Member Haire commented that Council needed to push Senator Rabin, Representative Salmon, and Representative Reives for the Bill entitled FOMFLR (Freedom of Movement for Leachate Revenue). He said that municipalities like Sanford should have the ability to move Leachate revenue where they wanted to, and that these Senators and Representatives had the authority to change the rules in order that municipalities could use the leachate revenue as they so desired. He said that if the money stayed in the Utility Fund the use would be extremely limited.

Mayor Mann commented that currently, the Leachate funds could only be used for infrastructure utility.

Council Member Wyhof congratulated everyone involved in the recent Christmas celebrations in Sanford. She commented that it was wonderful to see so many people out enjoying our City and coming together as a community.

City Manager Hal Hegwer encouraged Council to attend the Service Award Dinner Thursday, December 10, 2015. He said there were many employees who would be recognized for their years of service.

Mayor Mann commented that there seemed to be great momentum and energy in the Downtown Sanford area and in Sanford in general. He thanked the Public Works Department, the Police Department and all of the staff for their efforts in the current Christmas events.

Council Member Williams congratulated Fire Chief Wayne Barber on a job well done on the recent Fireman Christmas celebration. He commented that maybe next year there could be more participation from Council for this event.

Closed Session

City Attorney Patterson read a motion for Council to go into closed session in accordance with N.C.G.S.143-318.11(a)(4) to discuss matters relating to the location or expansion of industries or other businesses in the area served by the public body; (5) to establish or instruct the public body staff for the position to be taken on behalf of the public body in negotiating the price or other material terms of a contract or proposed contract for the acquisition of real property; (6) for the personnel exception and (3) for the attorney client privilege. So moved by Council Member Taylor and seconded by Council Member Wyhof in open session, the motion carried unanimously.

Return to Regular Session and Adjournment


Council Member Williams made the motion to adjourn the meeting; seconded by Council Member Post, the motion carried unanimously.

Respectfully Submitted,



T. CHET MANN, MAYOR

ATTEST:


BONNIE DAVIS, CITY CLERK

CHIEF OF POLICE
R. V. YARBOROUGH



TEL. 775-8268

POLICE DEPARTMENT

To: Hal Hegwer, City Manager

From: Vincent Frazer, Detective Sergeant
Investigative Division

Date: December 3, 2015

Re: 2016 Taxicab Operator's License Renewal

Four taxicab companies have submitted applications to renew their operator's licenses for the upcoming year, pursuant to Sanford City Ordinance § 10-366. Fleming Transportation has requested to operate the following three companies: Service Cab, American Yellow Cab and Pronto Taxi. All are owned and operated by Lois Fleming and the business is located at 307 South Gulf Street. Juana M. Guillen has requested to operate the following company: D.A.Y. Taxi Service owned and operated by Juana M. Guillen. The business is located at 154 McIver Street

Service Cab has requested to operate five taxicabs. Currently only one is in use and has passed inspection pursuant to City Ordinance § 10-451. The vehicle colors are white with black lettering.

American Yellow Cab has requested to operate three taxicabs. Currently no vehicles are in service at this time.

Pronto Taxi has requested to operate two taxicabs. Currently two taxicabs are operational and passed inspection. The vehicle colors are blue with black and white lettering.

D.A.Y. Taxi Service has requested to operate one taxicab. The vehicle color is blue with white lettering.

A criminal background check has been completed on the owners, which complies with State and Federal law. No violations were found that would prevent the listed owners from being issued a license to operate a taxicab company within the city limits.

Following are a list of companies and their current vehicles they wish to operate.


Service Cab: Taxi #203
2006 Ford Fusion
VIN Number: 3FAHP07166R237426
North Carolina Registration: TA-4971

Pronto: Taxi #402
1995 Ford Aerostar Van
VIN Number: 1FMDA31X0SZA4281
North Carolina Registration: TA-4972

Taxi #401
1998 Chevrolet Lumina
VIN Number: 2G1WN52K9W9286994
North Carolina Registration: TA-4970

American Yellow Cab: NONE

D.A.Y. Taxi Service: Taxi # 202
2008 Honda Odyssey
VIN Number: 5FNRL38798B107272
North Carolina Registration: TA-9882

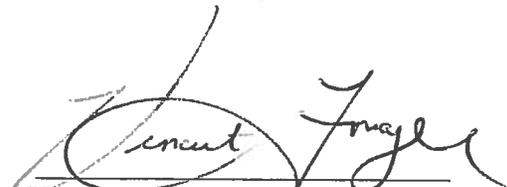

Vincent Frazer, Detective Sergeant
Sanford Police Department

CAPITAL PROJECT ORDINANCE AMENDMENT

SIDEWALK IMPROVEMENT BOND PROJECT (NO. B1401)

BE IT ORDAINED by the City Council of the City of Sanford, North Carolina that, pursuant to Section 13.2 of Chapter 159 of the General Statutes of North Carolina, the following capital project ordinance numbers 2014-08, 2014-46, 2014-54, 2014-58, 2015-07, 2015-09, and 2015-52 are hereby amended:

Section 1: The project authorized is for the costs of acquiring, constructing, reconstructing, extending or improving sidewalks, including without limitation, curbs, gutters, drains, bridges, overpasses, underpasses, and grade crossings and providing traffic controls, signals and markers and acquiring land, rights-of-way and easements required for any of the foregoing.

Section 2: The officers of this unit are hereby directed to proceed with the capital project within the terms of the bond proceeds and the budget contained herein.

Section 3: The following transfer is required:

Transfer of Funds

Transfer from the Following Accounts

Transfer to the Following Accounts

Sidewalk Improvements	10,000	Engineering Services	10,000
-----------------------	--------	----------------------	--------

Section 4: The Finance Officer is hereby directed to maintain within the Capital Project Fund sufficient specific detailed accounting records to satisfy the requirements of the bond agency, and state regulations.

Section 5: Funds may be advanced from the General Fund for the purpose of making payments as due. Reimbursement request should be made to the bond agency in an orderly and timely manner.

Section 6: The Finance Officer is directed to report, on a quarterly basis, on the financial status of each project element in Section 3 and on the total revenues received and claimed.

Section 7: The Finance Officer is directed to include in the annual budget information projects authorized by previously adopted project ordinances which will have appropriations available for expenditure during the budget year.

Section 8: Copies of this capital project ordinance shall be furnished to the Clerk to the City Council and the Finance Officer for direction in carrying out this project.

ADOPTED this, the 15th day of December, 2015.

T. Chet Mann, Mayor

ATTEST:

Bonnie Davis, City Clerk

Susan C. Patterson, City Attorney

December 1, 2015

Paul M. Weeks, Jr., P.E.
City Engineer
City of Sanford
P.O. Box 3729
225 E. Weatherspoon Street
Sanford, NC 27330

RE: Access Agreement

Dear Mr. Weeks:

Stanley Black & Decker, Inc. ("Stanley") is conducting an environmental investigation of its formerly owned property located at 2903 Lee Avenue in Sanford, North Carolina (the "Former Stanley Property"). As part of Stanley's investigation, Stanley would like to install and periodically sample groundwater monitoring wells (the "Wells") on property owned by the City of Sanford, North Carolina (the "City") identified as the non-paved portion of Keith Drive Right-of-Way (the "City Property"). Stanley wishes to gain access to the City Property to install, maintain and periodically sample the Wells. This letter sets forth the terms and conditions which will govern Stanley's access to the City Property (the "Agreement"). Please indicate your agreement to the terms and conditions set forth in this Agreement by signing a copy of the letter and returning it to me.

Description of the Work to be Performed on the City Property. The Wells will be installed by a North Carolina licensed driller. The wells will be flush mounted with a traffic-rated manhole. The Wells will be purged and samples will be collected for analysis for the presence of various chemical constituents. The drill cuttings (soil) generated during well installation and development and purge water generated during well installation and sampling will be placed into appropriate containers, sampled and disposed of properly by Stanley. Such waste will be removed from the City Property as soon as practicable by Stanley.

After the initial phase of work, it will be necessary to periodically monitor groundwater elevations and to collect groundwater samples. When the Wells are no longer required by Stanley, Stanley will abandon and seal the Wells in accordance with North Carolina Administrative Code Title 15A Subchapter 2C (NCAC 2C) standards and Stanley will repair and restore the surface of the City Property that is disturbed by Stanley or its representatives.

Grant of Access. To facilitate the installation and monitoring of the Wells, the City, on behalf of itself and its successors and assigns, grants permission for Stanley, its employees, agents and representatives (including consultants and contractors) (collectively "Stanley and its representatives") to enter and use the City Property subject to the terms and conditions set forth

Paul M. Weeks, Jr., P.E.
City of Sanford
December 1, 2015
Page 2

in this Agreement. Stanley and its representatives may enter and use the City Property solely for the purpose of (i) siting, installing and developing the Wells; (ii) periodically collecting samples or obtaining groundwater elevation measurements from the Wells; (iii) maintaining, repairing, replacing or abandoning the Wells; and (iv) repairing or restoring the Property as provided for below.

Duration and Termination of Access. The City agrees to permit Stanley and its representatives to enter and use the City Property as set forth in this Agreement beginning on the effective date of this Agreement and continuing from time-to-time until ninety calendar days after the abandonment of the Wells.

Conditions of Access. Stanley agrees that its access to the City Property pursuant to this Agreement shall (i) be restricted to the location where the Wells will be installed and the areas around and adjacent to such location as reasonably necessary for ingress, egress, temporary placement and the use of installation, sampling and removal equipment (including drilling rigs and other associated equipment) and vehicles; (ii) be restricted to the hours from 8:00 a.m. to 6:30 p.m. on normal business days; (iii) be available upon at least forty-eight hours advance notice by Stanley or its representative to the City; and (iv) be performed in a safe and workmanlike manner and in accordance with applicable laws and regulations.

Assistance by the City. The City agrees to provide Stanley with all information in the City's possession or the possession of its representatives regarding the location of underground utility lines and subsurface obstructions and infrastructure at the City Property in the vicinity of the area where the Wells are to be installed to assist Stanley and its representatives in determining the final location of the Wells. The City agrees to provide to Stanley such information promptly after Stanley's request for the information.

Restoration of the City Property. Stanley agrees to, at its sole cost and expense, promptly restore the City Property disturbed by Stanley or its representatives during installation or sampling of the Wells. Following the completion of Stanley's investigation, Stanley agrees to, at its sole cost and expense, promptly remove or abandon and seal the Wells at the City Property in accordance with applicable North Carolina regulations and restore the surface of the City Property that is disturbed during such removal or abandonment of the Wells.

Laboratory Results. Upon the City's request, Stanley will provide the City with copies of final laboratory reports of analyses of ground water or soil collected by Stanley from the Wells.

Hold Harmless. Stanley Agrees to hold the City harmless from and against any claim or loss arising out of any injury to Stanley's employees or contractors incurred while performing work on the City Property or due to the existence of the well pursuant to this Agreement.

Indemnification. Stanley Shall indemnify, defend and hold the City harmless for and against demands and causes of action any third party, including reasonable expenses of defense, for and to the extent of personal injury, illness, death and property damage arising out of the

Paul M. Weeks, Jr., P.E.
City of Sanford
December 1, 2015
Page 3

negligent performance of the work by Stanley or its contractors or due to the existence of the wells pursuant to this Agreement.

Binding Effect. In consideration of the foregoing and other good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the parties agree that this Agreement is a valid, binding and enforceable obligation of each party. Stanley represents and warrants that it has and maintains adequate financial resources to undertake and satisfy its obligations under this Agreement.

Sincerely,

STANLEY BLACK & DECKER, INC.



Kathryn E. Hinckley
Director, Environment, Health and Safety

Accepted and Agreed to this


___ day of _____, 2015

City of Sanford, North Carolina

By: _____
Authorized Representative

Name: _____

Title: _____

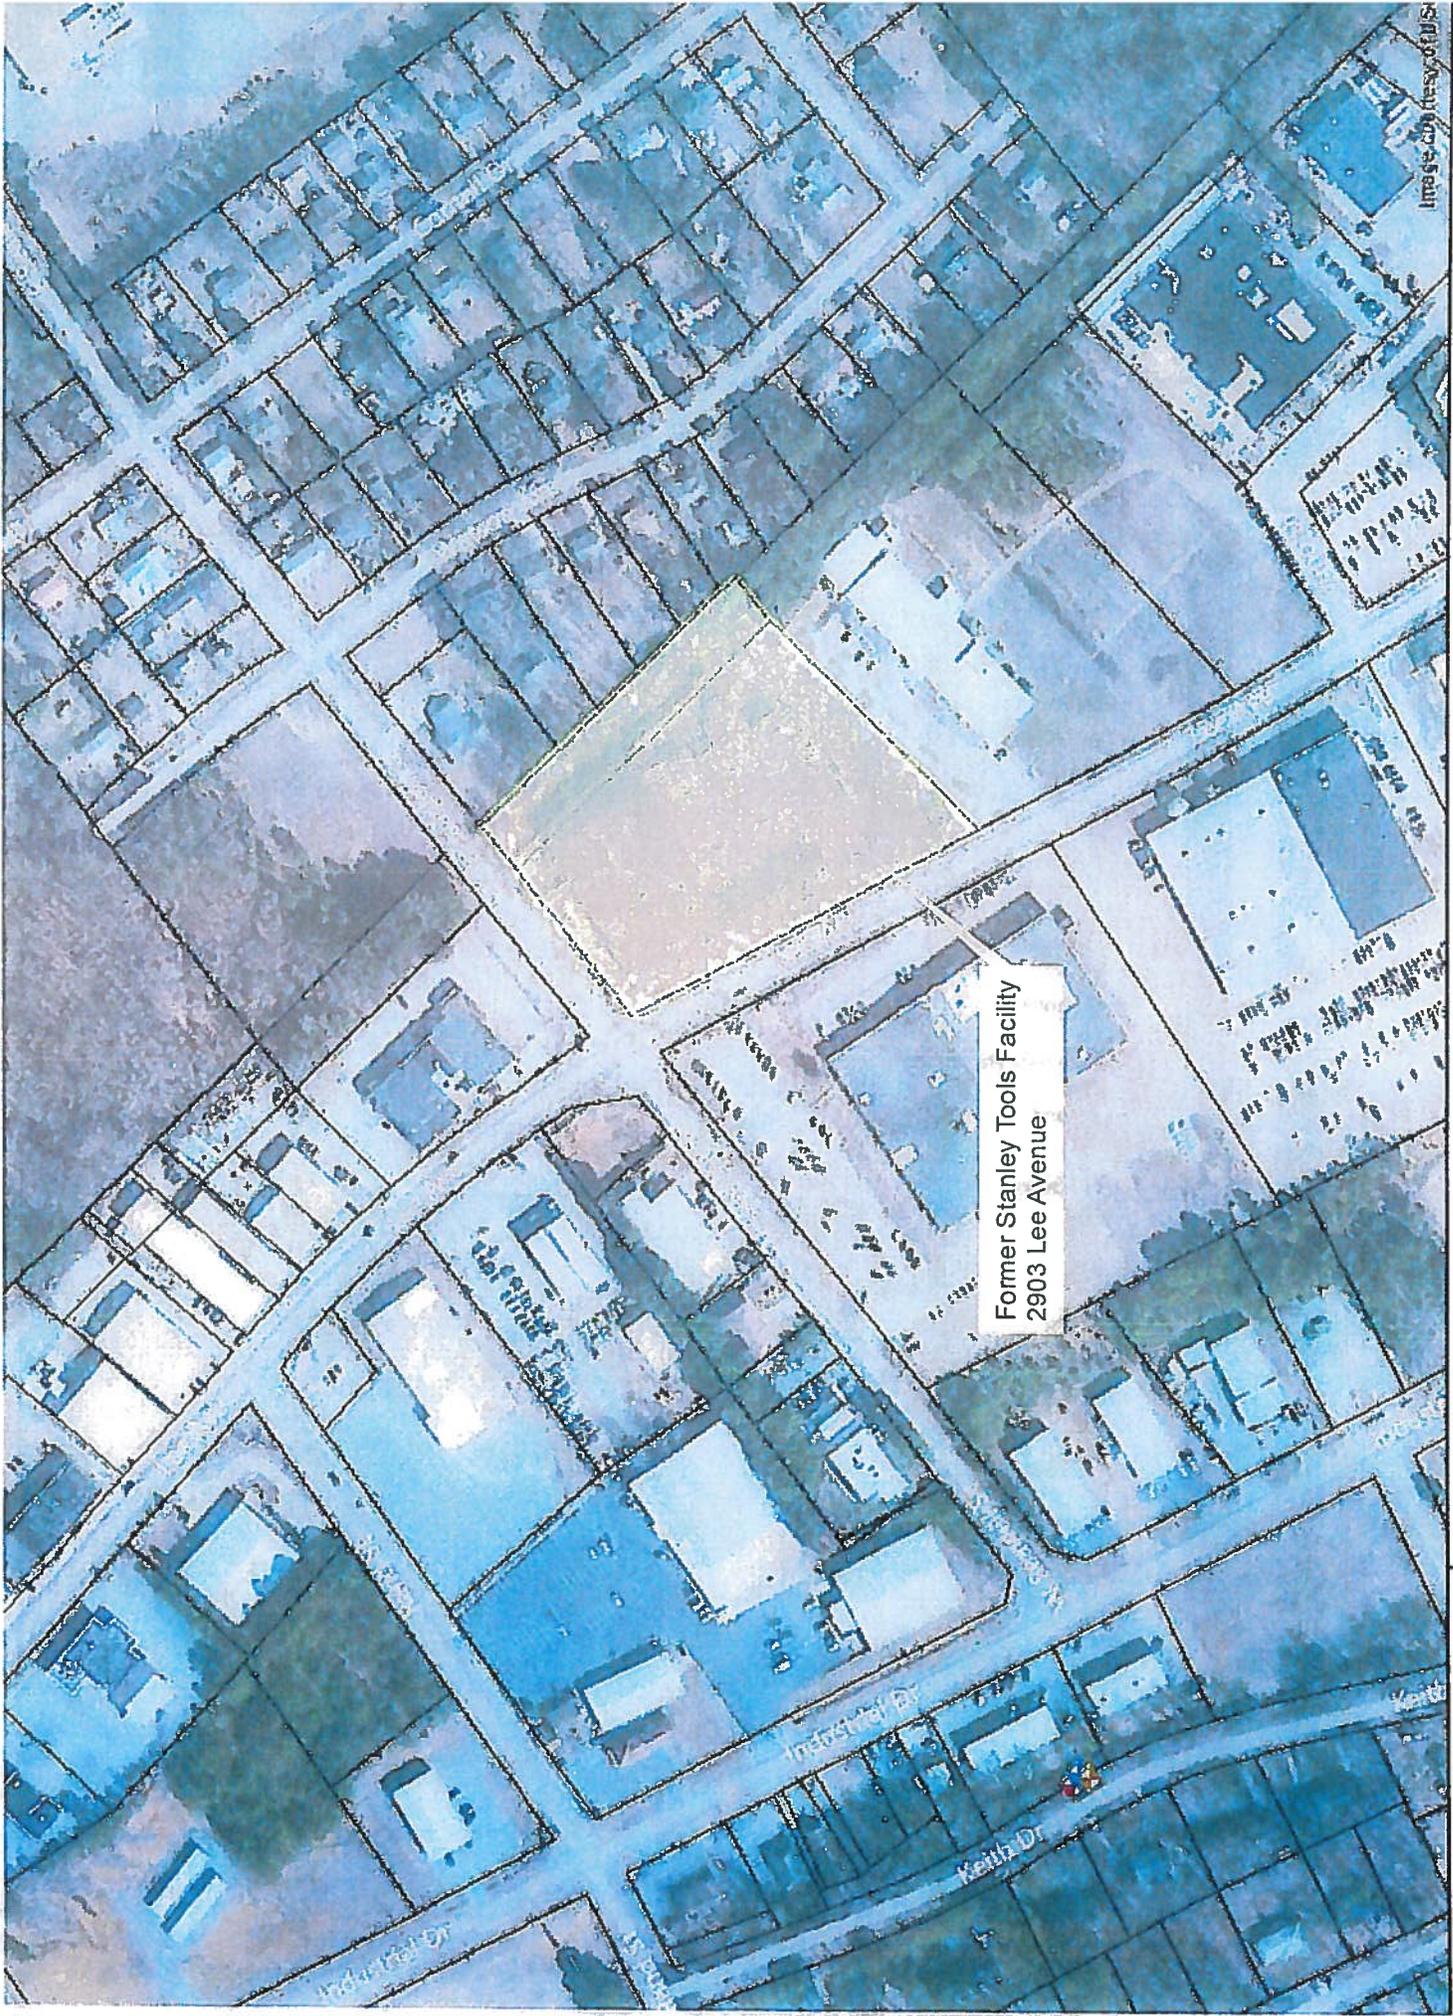


Proposed Well Locations

Keith Drive

Top Bedrock Well

Site Location:	Date Installed:
Well Location:	Coords:
Method:	Inspector:
	Contractor:

PROPOSED MONITORING WELL CONSTRUCTION DETAIL

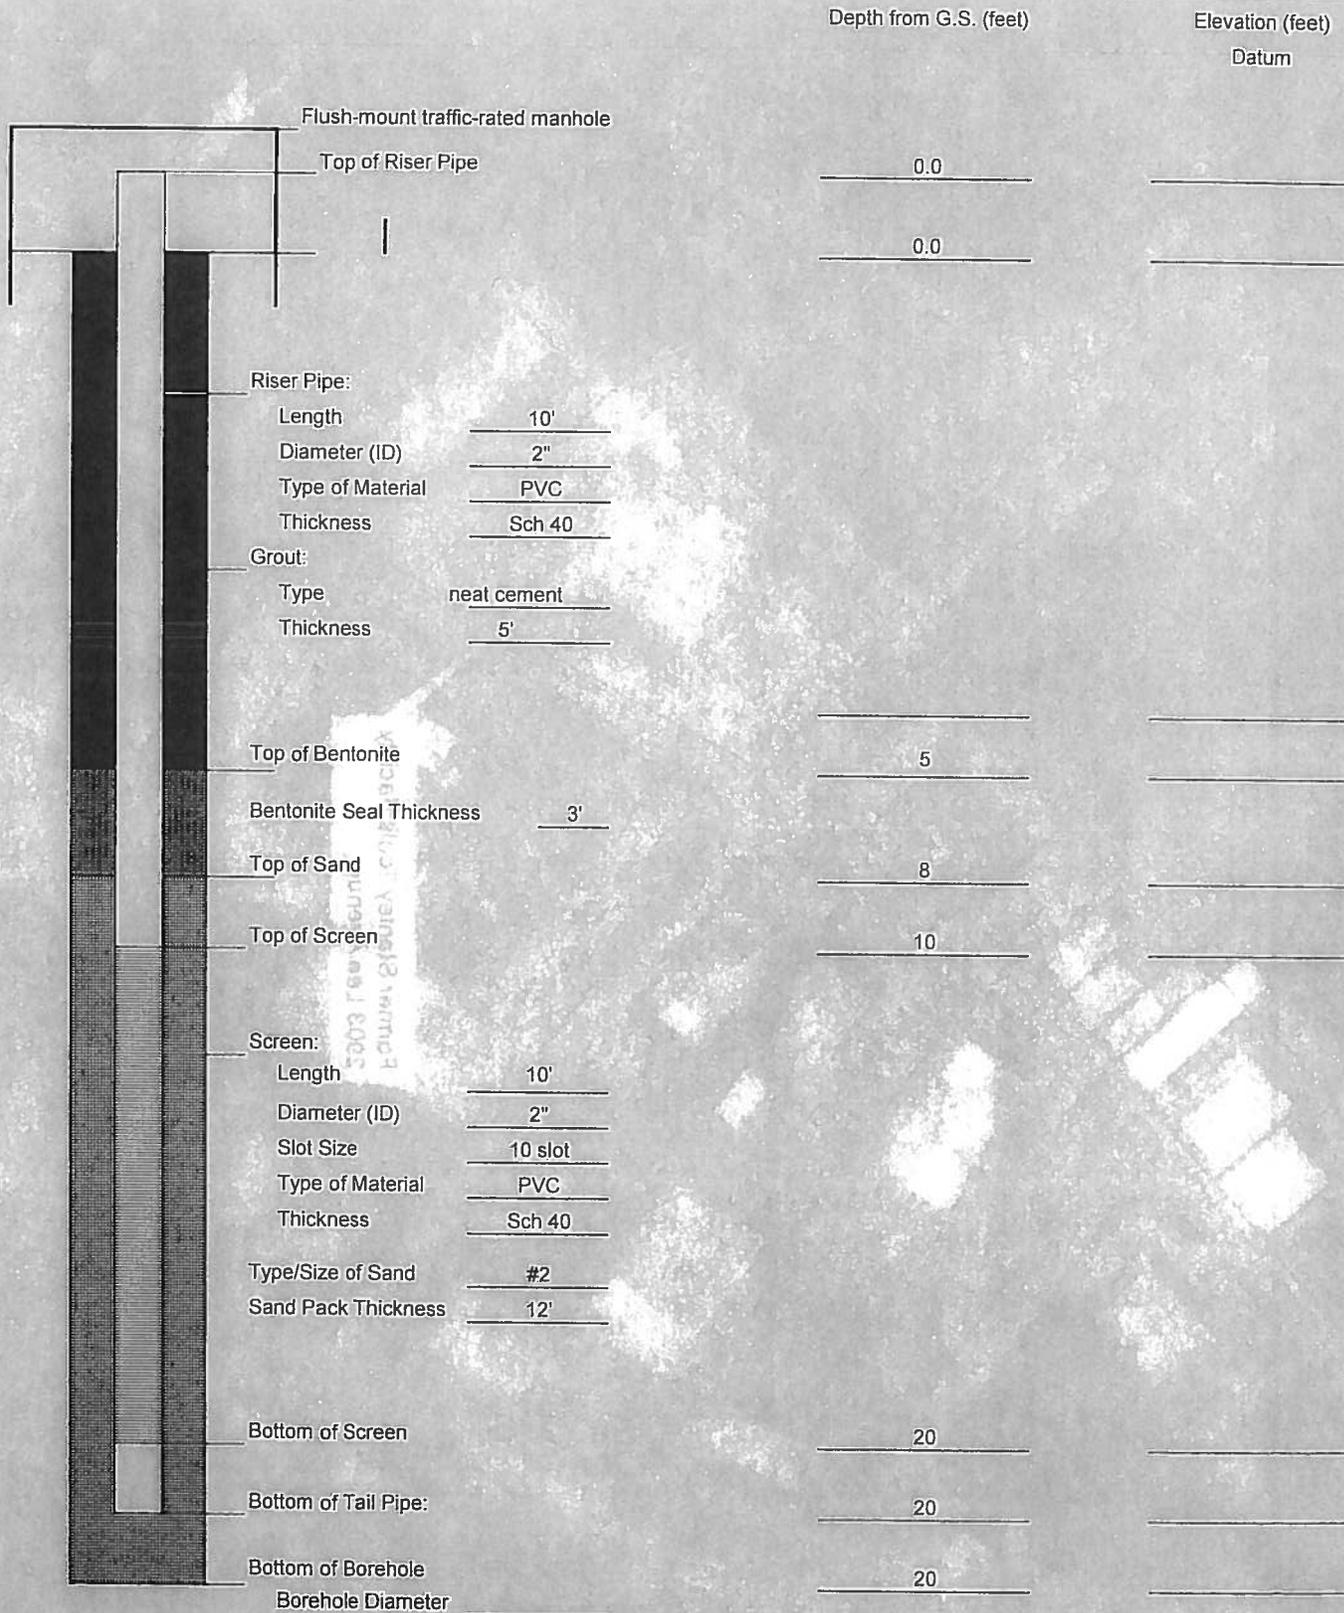

Describe Measuring Point:


Signature _____

Date _____

K-1111 L-1111

Proposed Well Locations

PROPOSED MONITORING WELL CONSTRUCTION DETAIL

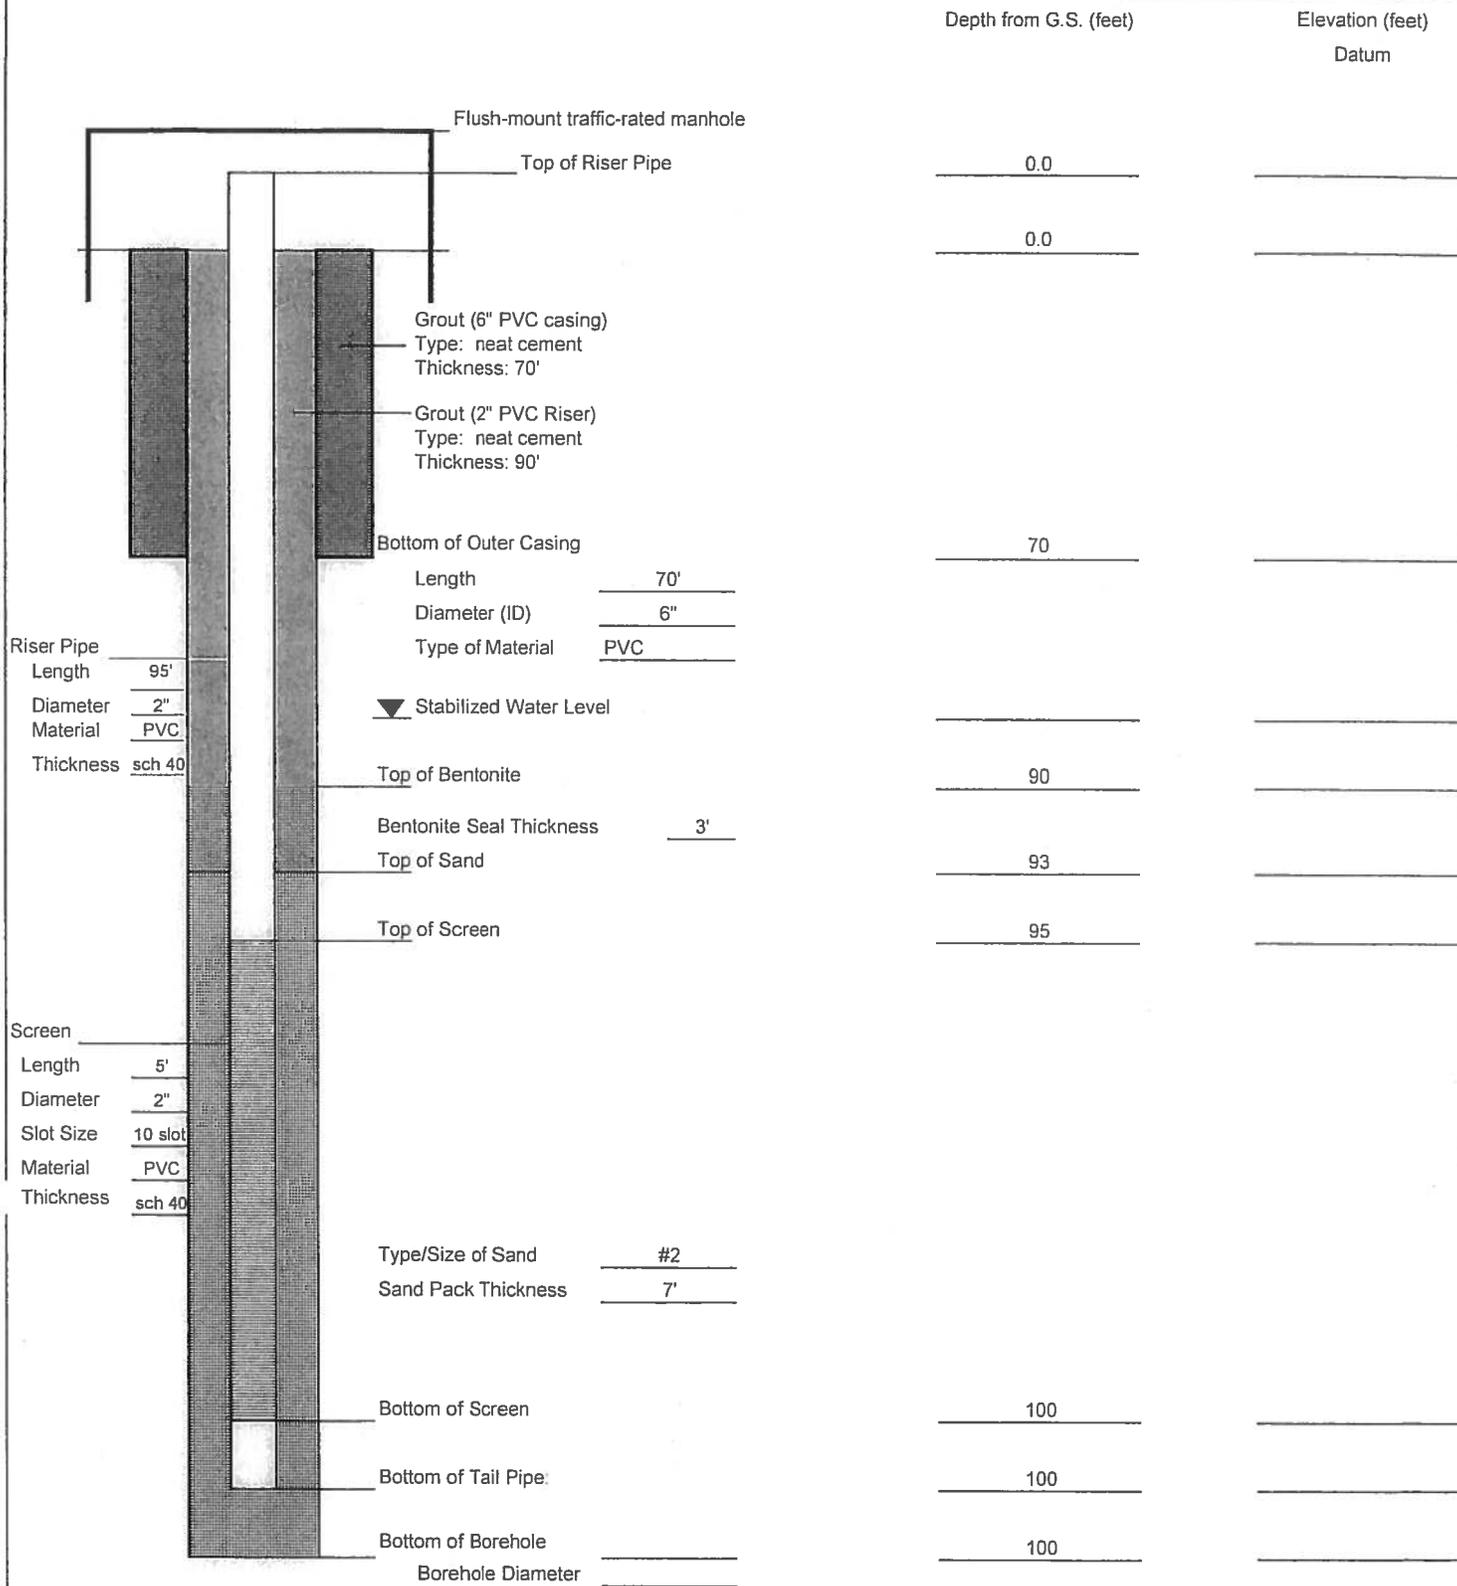

Describe Measuring Point: _____

Signature _____

Date _____

Note: Depths are approximate and will be adjusted based on field conditions. Not to scale.

AUTHORIZING RESOLUTION BY GOVERNING BODY OF THE APPLICANT

Economic Infrastructure Grants Program

Comfort First Heating & Cooling - Waterline Extension Project

WHEREAS, the North Carolina Rural Infrastructure Authority (RIA) has authorized the awarding of grants from appropriated funds to aid eligible units of government in financing the cost of infrastructure activities needed to create jobs; and

WHEREAS, the City of Sanford needs assistance in financing an infrastructure project that may qualify for Rural Grants/Programs funding; and

WHEREAS, the City of Sanford intends to request grant assistance for the *Comfort First Waterline Project* from the Economic Infrastructure Grants Program;

NOW, THEREFORE, BE IT RESOLVED, BY THE CITY COUNCIL OF THE CITY OF SANFORD:

That City of Sanford will arrange financing for all remaining costs of the project, if approved for a grant.

That T. Chet Mann, Mayor and successors so titled, are hereby authorized to execute and file an application on behalf of City of Sanford with the Rural Grants/Programs Section for a grant to assist in the above-named infrastructure project.

That T. Chet Mann, Mayor, and successors so titled, are hereby authorized to execute and file an application on behalf of the City of Sanford with the Rural Grants/Programs Section for a grant to assist in the above named infrastructure project.

That Phillip "Hal" Hegwer, Manager, and successors so titled, are hereby authorized and directed to furnish such information as Rural Grants/Programs Section may request in connection with an application or with the project proposed; to make assurances as contained in the application; and to execute such other documents as may be required in connection with the application.

That City of Sanford has substantially complied or will substantially comply with all federal, state, and local laws, rules, regulations, and ordinances applicable to the project and to the grants pertaining thereto.

Adopted this December 15, 2015 at Sanford, North Carolina.

T. Chet Mann



ATTEST:

Bonnie Davis, City Clerk

Rosemount-McIver Park Guidelines

Sanford, North Carolina

DRAFT 12-8-2015

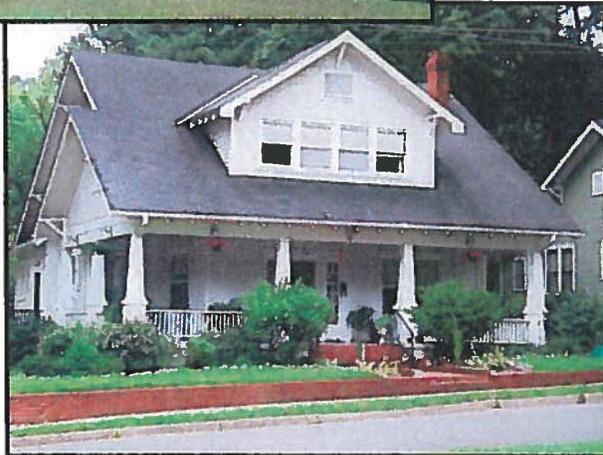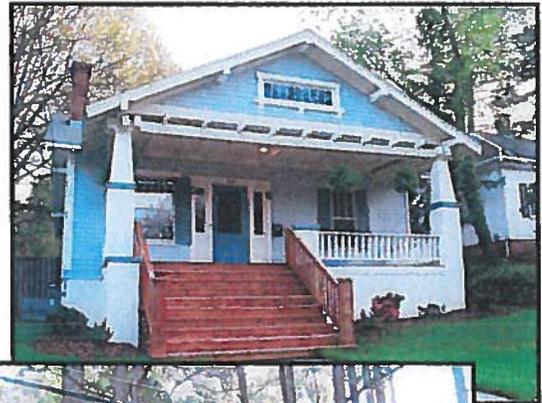

Acknowledgments:

This document was created by a citizen's appointed committee by the Chairman of the Historic Preservation Commission. The document was submitted to the Historic Preservation Commission to review and revise as they felt appropriate. The Historic Preservation Commission has revised these guidelines from the original that were submitted to the Historic Preservation Staff on February 7, 2011.

This document has been years in the making and during that time frame the citizen committee changed members numerous times. The City of Sanford thanks all citizens who participated on the Revision of the Rosemount McIver Park Historic Guidelines, as well as the Historic Preservation Commission.

City of Sanford web site:

<http://www.sanfordnc.net/index.htm>

Historic Preservation web site:

http://www.sanfordnc.net/historic_preservation/hpc.htm

Contact information:

**Historic Preservation
226 Carthage Street
Sanford, NC 27330**

919-777-1406

liz.whitmore@sanfordnc.net

Table of Contents

I.	Introduction-----	5
	A. Statement of Philosophy-----	6
	B. Sanford Historic Preservation Commission-----	7
II.	Design Review Process-----	9
	A. Obtaining a Certificate of Appropriateness-----	10
	1. Overview-----	10
	2. Certificate of Appropriateness (COA)-----	10
	3. Routine Maintenance, Minor and Major Work-----	11
	4. Timelines-----	12
	5. Temporary Stabilization-----	13
	6. Building and Sign Permits-----	13
	7. Variance-----	14
	B. Description of Projects-----	14
	1. Routine Maintenance-----	14
	a. Public Right-of-Way-----	14
	b. Private Property-----	15
	2. Minor Work-----	15
	a. Public Right-of-Way-----	16
	b. Private Property-----	16
	3. Major Work-----	17
	4. Emergency Work-----	17
	C. Violations and Penalties-----	17
	D. Appeals-----	18
III.	Sanford's Historic Neighborhoods-----	19
	A. Introduction (RMP Maps)-----	20
	B. Rosemount Mclver Park Historic Architecture-----	24
	1. Queen Anne (1875-1915)-----	23
	2. Revival Style (1900-1930)-----	24
	3. Bungalow (1905-1930)-----	25
	4. American Foursquare (1905-1930)-----	26
		27
IV.	Design Review Guidelines-----	
	A. Purpose-----	28
	B. Landscape Features-----	30
	1. Public Right-of-Way-----	30
	2. Landscaping and Trees (Private Residence)-----	30
	3. Appurtenant Features-----	33
	4. Walks, Steps and Driveways-----	34
	5. Terraces and Patios-----	35
	6. Swimming Pools/Hot Tubs-----	35
	7. Accessory Structures-----	35
	8. Parking Areas and Lots-----	37
	9. Lighting-----	39
	10. Signs-----	39
	11. Fences and Walls-----	41

Table of Contents Continued

C. Building Exterior -----	43
1. Architectural Components and Details-----	43
2. Foundations-----	43
3. Masonry-----	44
4. Chimneys-----	46
5. Roofs-----	47
6. Architectural Metals-----	49
7. Siding and Trim-----	49
8. Windows and Doors-----	50
9. Storm Windows and Doors-----	52
10. Awnings-----	53
11. Porches, Patios and Steps-----	53
12. Exterior Colors-----	56
13. Reserved-----	56
14. Mechanical Systems, Utilities and Retrofits-----	57
V. New Construction -----	58
A. Introduction -----	59
1. Primary Structures-----	60
2. Secondary or Accessory Structures-----	62
3. Additions to Existing Structures-----	63
4. Decks-----	63
B. Moving Buildings -----	64
C. Demolition -----	65
VI. Appendices -----	67
A. Landscape and Building Terminology -----	68
B. Glossary -----	70
C. Plant Materials -----	75
D. Quick View Matrix -----	81

I. INTRODUCTION

I. INTRODUCTION

This document is governed by and interpreted by the UDO Uniformed Development Ordinance which can be referenced at the Planning Office or on line at www.sanfordnc.net.

A. Statement of Philosophy

The North Carolina State Legislature has stated in N.C.G.S. 160A-400.1 that *“the historical heritage of our State is one of our most valued and important assets. The conservation and preservation of historic districts and landmarks stabilize and increase property values in their areas and strengthen the overall economy of the State.”* For these reasons, the State authorized its cities and counties:

1. *“To safeguard the heritage of the city or county by preserving any district or landmark therein that embodies important elements of its culture, history, architectural history, or prehistory; and*
2. *To promote the use and conservation of such district or landmark for the education, pleasure and enrichment of the residents of the city or county and the State as a whole.”*

The City of Sanford City Council may designate both historic districts and individual properties as local landmarks based on the above criteria. As of 2011, two local districts have been designated by City Council as an overlay to existing zoning: Downtown Sanford and the Rosemount-McIver Park residential district. The local designation gives the Historic Preservation Commission (HPC) the legal authority to review and regulate proposed changes to the exterior of buildings, landscaping and archaeological resources in these districts. Properties within these districts may not be significantly changed, moved or demolished without an approved Certificate of Appropriateness (COA) from the Historic Preservation Commission.

Historic district zoning is not intended to create museum districts, nor is it limited to saving very old and very grand architectural landmarks. Rather, historic districts are created because, taken as a whole, they embody important elements of a city’s culture and history. Therefore, when considering projects within a district, the Commission is charged with looking not only at alterations to an individual structure, but the effect those changes will have on the district as a whole.

Changes within historic districts are inevitable. Historic districts should blend the best of both old and new, while ensuring that the *special character* of these areas is maintained. It is the responsibility of the Historic Preservation Commission to see that the exterior of new buildings and exterior changes to existing structures are compatible with the overall character of the districts.

Designation of both historic districts and individual properties as local landmarks requires a detailed research report and City Council approval. Local designated properties should be individually important enough to the community to warrant special attention. Once designated, the property may not be significantly changed, moved or demolished without an approved Certificate of Appropriateness from the Commission.

By such designation and regulation of historic districts and individual properties, the City of Sanford and the Historic Preservation Commission hope to stabilize the remaining historic stock, to encourage the efforts of area residents to conserve the environment of the historic neighborhoods and to protect, preserve and embrace Sanford's heritage.

B. Sanford Historic Preservation Commission

The Historic Preservation Commission (HPC) is a regulatory and advisory board composed of a minimum of seven members appointed by City Council to serve three-year staggered terms as outlined in the Unified Development Ordinance, to administer historic district and locally designated historic property regulations. Commission members are volunteers selected based on a demonstrated special interest, experience, or education in architecture, archaeology or history. The Commission operates under an approved set of Rules and Procedure. The Commission's primary responsibility is to review major work Historic Preservation Certificate of Appropriateness (COA) applications. This review ensures that proposed changes within the historic districts, demolition, moving of buildings and landscape improvements are consistent with the Design Review Guidelines.

Some other Commission powers and responsibilities, per the N.C.G.S. Section 160A-400.8, are as follows:

- 1) Recommend historic properties and districts to City Council for local designation, or removal of designation.
- 2) Advise the Planning and Zoning Commission regarding proposed zoning changes within historic districts.
- 3) Recommend to the Board of Adjustment that certain variances to dimensional requirements be granted in historic districts when the proposed project is in conformance with the Design Review Guidelines.
- 4) Provide technical advice about restoration and home improvement projects.
- 5) Carry out public education programs to increase public awareness of Sanford's heritage through its architecture.
- 6) Encourage the rescue and maintenance of irreplaceable historic resources which are threatened.
- 7) Cooperating with state, federal, and local government in pursuance of its responsibilities.
- 8) Conducting meetings or hearings necessary to carry out these purposes.

The Commission meets on the fourth Monday of each month at 7:00 p.m. in the West End Conference Room of the Municipal Building unless changed and the public notified in advance according to established public notification rules. As the Commission is a quasi-judicial body, certain meeting procedures must be followed, including swearing/affirmation of speakers, entering of evidence and recognition of and adherence to rules of procedure and order.

II. Design Review Process

A. OBTAINING A CERTIFICATE OF APPROPRIATENESS

1. Overview

Historic districts are not created to prevent changes. Rather, the Sanford Historic Preservation Commission offers assistance to the property owner in shaping changes while meeting the requirements of the Ordinance. The Ordinance provides for a process that ensures that property changes are within the spirit and the character of the historic district. In this special design review process, plans are reviewed and evaluated before work is begun. The process does not require property owners to make changes to their properties, and it does not apply to interior alterations or routine maintenance that does not affect exterior appearance. However, any exterior alterations, new construction, demolition, significant landscape changes, or moving of buildings must be evaluated. In the case of demolition the Ordinance provides for a delay of up to 365 days during which alternatives to demolition can be explored.

One of the purposes of the Sanford Historic Preservation Commission is to assist and consult with property owners about proposed changes to properties in the historic districts. In the early planning stages of a project, property owners should call the Sanford Historic Preservation staff with any questions or concerns. The staff can assist by interpreting the Ordinance and Design Guidelines, suggesting solutions to problems, and explaining the review process.

2. Certificate of Appropriateness (COA)

A Historic Preservation Certificate of Appropriateness is a document issued by the City of Sanford Planning Department Staff, specifically the City Preservation Officer, also referenced as "HPC staff," or simply "staff." A COA indicates the property owner's agreement to execute a project that will adhere to the guidelines, formally known as the "Design Review Guidelines," or sometimes simply "guidelines" and is contained in the "Design Review Manual." Each local district has its own set of specific guidelines.

The applicant should contact staff prior to beginning a project to determine whether the work is Routine Maintenance, Minor Work (staff level review) or Major Work (requires a public hearing). If the project is deemed Major Work the applicant must submit a completed application, once staff has determined that the application is complete a public hearing before the Historic Preservation Commission will be scheduled. Notification will be sent to all property owners within 100 feet of the subject property and the application is advertised in the Sanford Herald at least 10 days prior to the public hearing and the Thursday prior to the meeting. A formal response on all applications is required within 60 days (per the UDO Section) of the submitted completed application (staff will determine if the application submitted is complete). If action has not been taken within the allotted 60 days the COA is approved by default. The Historic Preservation Commission may approve, approve with conditions or deny the application.

Once the project is complete, the project will be checked by the City Preservation Officer to determine if the guidelines have been met and if final approval for closing the project can be given. If work does not meet the guidelines, a violation may be issued which may also include fines as specified by the City of Sanford and Lee County Unified Development Ordinance.

Copies of the Design Review Guidelines are available from the Planning Department and online via the City of Sanford webpage.

Any building which is located in a local historic district or which is a locally designated individual historic property cannot have its exterior materially altered, be moved or demolished unless a Historic Preservation COA has been issued. Some landscaping or archaeological projects also require a COA application.

The applicant or legal representative is required to be present during the HPC meeting when the application is being considered. If the applicant cannot attend, a representative who can speak for and legally bind the applicant must be present. The applicant and general public will be given opportunity at the meeting to make comments and/or ask questions.

3. Routine Maintenance, Minor Work, and Major Work

Routine Maintenance, or strict repairs that do not change design or materials, such as replacing broken window panes with like-kind materials or pruning shrubbery will generally not require approval and thus a COA, but it is a good idea to confirm before the work is started. Staff can be consulted for guidance.

There are two standard types of applications for a Certificate of Appropriateness - Minor Work and Major Work. Once the property owner has received an approved COA and displayed the COA in a conspicuous place on the front of the building, work can begin.

For some Minor Work projects, a brief description in the COA application may be sufficient. The Planning Department staff may help the homeowner complete Minor Work applications, and staff can approve Minor Work COAs immediately. However, the application must clearly describe the work that is being proposed and must include appropriate supporting materials as needed. Proper documentation is essential in order for staff and the HPC to do their job of classifying the work appropriately and evaluating the project with respect to the Design Review Guidelines.

If a project presented as Minor Work does not clearly meet the guidelines or there are other concerns that warrant review by the HPC itself, staff may choose to forward the application to the Historic Preservation Commission for consideration as a Major Work. Staff cannot deny a Minor Work COA per se, but staff can choose to not approve the Minor Work COA and the applicant can then decide if they wish to rescind the application, modify the application based on feedback from staff or have the project presented the HPC for review.

All Minor Work COAs are valid for six months following the issuance of the COA. Once the six month deadline has passed for an approved Minor Work, any further work will require a new approved application to continue the project.

A Major Work application for a COA must be scheduled for a hearing before the HPC in order to obtain a COA before any work is started. Staff will help the resident prepare for the presentation to the HPC but cannot compile or present the presentation itself.

For major projects such as new construction, additions and accessory buildings, scaled elevation drawings, final working drawings/specifications, and material samples are required along with a site plan, landscape plan and photo of the construction area.

Improvements such as parking areas, driveways, walks, fences, patios, and decks must be shown on a survey or measured diagram of the property. Samples of material, manufacturer's brochures and photographs, etc. should be provided if appropriate.

All routine Maintenance, Minor Work and Major work will be inspected by the city Preservation Officer and must meet the Design Guidelines.

4. Timelines

An application for a major work COA shall be completed and turned into staff no later than 21 days prior to the HPC monthly meeting. Applications MUST be complete prior to the review process beginning. It is not required but strongly recommended that applicants contact staff prior to submitting their application to discuss the project.

Property owners are urged to submit their applications as early as possible so that staff can determine if the application is complete; that is, all illustrative and supporting material necessary to describe the project has been submitted.

All Major Work COAs are valid for 12 months following the issuance of the COA. Once the 12 month deadline has passed, the City Preservation Office may extend the COA for another year if the plan has not changed and work has begun. Any change in plan or if work has not begun will require reapplication to the HPC for the project and a new COA.

5. Temporary Stabilization

Temporary stabilization, weatherproofing or “securing” of a historic structure is encouraged when necessary and other more appropriate options are not available. Work of this type that conforms to the guidelines could fall under Minor or Major Work as appropriate. Extreme examples could also potentially fall under the Emergency Work category.

However, temporary stabilization work often does not conform, as by definition this type of work generally is undertaken when it is not currently technically or economically feasible to completely repair or restore the historic feature or entire structure. If the temporary stabilization, weatherproofing or securing work does not meet the Design Review Guidelines, the COA application must clearly identify the type of work that is non-conforming and the justification and benefit. Further, the COA *must include a plan and timeline for removal of the temporary work*. The non-conforming work must be reversible, minimize damage to historic features and the HPC must approve the timeline for removal.

Stabilization work that does not conform to the guidelines will always fall under the Major Work category and is evaluated on a case-by-case basis. As with all Major Work COA's the COA for stabilization will expire annually and can be extended, but staff would encourage work of this type to be reversed at the earliest opportunity and the historic structure or feature properly repaired or restored accordingly.

6. Building and Sign Permits

Building and sign Permits, when required, will not be issued for exterior work in a local historic district or upon local landmarks without an approved Historic Preservation COA. However, the HPC does not issue or administer building or sign permits.

A Building Permit ensures that the work will be inspected for compliance with the State Building Code. The Building Permit fee is based on the estimated cost of the work and set by the Sanford Inspections Department. Please note that a Historic Preservation COA will be required for Minor and Major Work projects even if a Building Permit is not issued or required for a project.

A Building Permit is typically required for any structural repairs and/or for improvements to a property where the cost exceeds \$5,000. The term “structural” refers to essential construction elements such as, but not necessarily limited to, the foundation, framing and roof. A building permit is also often required for any work involving the electrical, heating, air conditioning and plumbing systems. The Inspections Department should be contacted to see if a permit is required.

7. Variance

If a project does not conform to the dimensional or setback requirements of City Code, a variance from the City of Sanford Board of Adjustment must be obtained after the Commission's approval of a Historic Preservation COA. HPC staff will assist in the application for a variance if the project has been approved by the Commission. The HPC cannot guarantee that the Board of Adjustment will issue a variance for any given project.

B. Description of Projects

For administrative purposes, exterior projects are divided into four categories:

- Routine Maintenance – No COA required, generally repairs and maintenance.
- Minor Work – Staff Review COA, generally non-permanent or minor changes.
- Major Work – HPC Review COA, generally substantial changes.
- Emergency Work – any of the following; Staff Review COA, HPC review, emergency changes.

The matrix may be found in the appendix of this document.

1. Routine Maintenance

Routine Maintenance does not require a Historic Preservation COA as no change is made to the property. Routine Maintenance generally falls under the classification of “repair” or “maintenance” and requires the use of identical materials and no change in design if a significant repair is made. The following activities are considered Routine Maintenance, however this list is neither exclusive nor comprehensive and the City Preservation Officer can use their best judgment in the evaluation of Routine Maintenance projects.

a. Public Right-of-Way

1. Sealing and patching sidewalks.
2. Marking pavement.
3. Repairing sidewalks.
4. Construction or repair of curbs and gutters.
5. Addition of utility poles and wires.
6. Installation of traffic and parking signs.
7. Resurfacing streets.
8. Maintaining utility poles and wires.
9. Maintaining signals and street lights.
10. Repairing underground utilities.
11. Maintaining landscape.
12. Trimming or pruning work of trees necessary to remove dead, broken or injured branches or to suppress uneven growth (such as removal of water sprouts or crossed or rubbing branches within the tree canopy). Lower branches less than two (2) inches in diameter which pose a threat or an obstacle to vehicle or pedestrian traffic may be removed.

b. Private Property

1. Painting siding or trim same as existing color. (Masonry which previously was unpainted is a Major Work.)
2. Replacement of window glass with like-kind material.
3. Caulking and weather-stripping.
4. Installation, repair or replacement of window air conditioners, television antennae, small satellite dishes and other temporary & permanent mechanical equipment in accordance to the guidelines.
5. Landscaping that is not considered historically significant, including vegetable and flower gardens, shrubbery and rear yard trees.
6. Pruning (not topping) trees and shrubbery.
7. Repairs to walks, patios, fences and driveways as long as replacement materials match the original or existing material in type, detail, dimension and color.
8. Replacement of small amounts of missing or deteriorated siding, trim, roof shingles, porch flooring, etc., as long as replacement materials match the original in type, detail and color. (For siding, roofing and porch flooring, replacing approximately twenty (20) square feet or less will be considered routine maintenance.)
9. Erection of temporary signs (real estate, political, etc.), 31 day, 5 square foot limitation.
10. Removal of existing aluminum and canvas awnings and canopies.
11. Removal of cinderblock walks or steps. Removal of railroad ties or landscape timbers around planting beds.
12. Removal of aluminum storm doors and aluminum storm windows.
13. Removal of metal storage buildings.
14. Repair of existing signs.
15. Underground tank removal.
16. Masonry or stone repairs that utilize the same design and materials, including re-pointing of mortar.
17. Repair of exterior light fixtures.

2. Minor Work

Minor Work items require a Historic Preservation COA that can be issued by the City Preservation Officer. The project must be completed within 6 months and cannot be extended. A Historic Preservation COA can be issued as soon as the completed application, including all documentation, is submitted. Minor Work projects generally include various projects in which the visual character of the property is not substantially or permanently changed. All Minor Work must conform to the guidelines. Accepted Minor Work is explicit and limited to the following list.

a. Public Right-of-Way

1. Repair of entrance markers, fountains, and street accessories (benches, mailboxes, trash cans).
2. Removal of any street trees. The applicant must first obtain written permission from city and/or property owner.
3. New street furniture (benches, trash cans, mailboxes and newspaper racks).

b. Private Property

1. Documentation from an arborist or equivalent is required to remove mature, dead or diseased trees.
2. Installation of metal foundation vents and replacement of wood foundation/basement access doors.
3. Removal of vinyl siding when the original siding is to be repaired and repainted. However, the replacement of original documented siding is considered Major Work.
4. Complete replacement of missing or deteriorated architectural details including siding and trim, porch floors, ceilings, columns, balustrades, or other architectural details with materials that are identical to the original.
5. Removal of deteriorated accessory buildings, which are not original to the site or otherwise historically significant.
6. Replacement of retaining walls with like materials and design.
7. Replacement of existing masonry walkways with like materials and design.
8. Extensions of Historic Preservation Major Work COAs if no change in plan, and if work has begun during the first year of the valid COA.
9. Replacement of original shutters with those identical in design and materials as original.
10. Installation of gutters and downspouts (as long as the color matches the house trim color), roof ventilators on rear slopes, and chimney caps.
11. Installation or alteration (but not removal) of handrails to existing steps and stairs when in adherence to the guidelines.
12. Installation of house numbers, mailboxes and flag brackets.
13. Replacement of exterior light fixtures when in adherence to the guidelines. New installations are considered Major Work.
14. Playground equipment and movable play houses installed in accordance with the guidelines.
15. Pet and livestock enclosures, such as "dog pens" installed in accordance with the guidelines (see Accessory Structures).
16. Replacement of missing, deteriorated or damaged portions of structures, provided there is little change in appearance and dimension, with new materials that are identical or closely similar in color and composition to those previously existing.
17. Alteration, addition or removal of gardens, planting beds or shrubbery that are historically significant.
18. Installation of hedges or screen plantings that are not located in the front yard and do not alter the streetscape or obscure a character defining façade of the structure.

19. Removal of existing fences, walls, hedges and screen plantings that are not historically significant and are less than 4 feet tall.

3. Major Work

Major Work projects must be reviewed by the Historic Preservation Commission without exception. In general, these projects involve a change in the appearance or historic fabric of a property and are more substantial in nature than Minor Work projects. These projects have a one-year time period for completion, but can be extended if work has begun within the year. Any work not clearly Routine Maintenance or explicitly identified in the previous Minor Work section is considered Major Work by default. Some examples of Major Work include but are not limited to: additions to a historic resource, replacing historic materials such as roofs and windows.

Any project can be promoted to the HPC as a Major Work if requested by the applicant or if the City Preservation Officer feels the nature of the project warrants review by the full Commission. If in doubt, it is recommended that projects be presented to the Commission as a Major Work. Projects that specify the *removal* of any historic feature will often fall into the Major Work category.

4. Emergency Work

Emergency COAs will be approved as soon as possible by the City Preservation Officer for anything that staff deems dangerous to persons or properties that cannot wait until the next scheduled HPC meeting if it is Major Work. Major Work Emergency COAs will be reviewed by the HPC at the next scheduled meeting for final "official" approval as technically only the HPC can approve Major Works, although work may begin immediately upon staff approval of Emergency Work COAs.

Examples may include handicapped accessible structures such as ramps. Other examples include but are not limited to: the installation, alteration or removal of temporary features that are necessary to ease difficulties associated with a medical condition and storm damage to a historic resource

CALL HPC STAFF AT THE EARLIEST CONVENIENCE AT (919) 777-1406 TO ADDRESS ISSUES OF THIS TYPE.

C. Violations and Penalties

A violation of the rules and regulations of the Historic Preservation Commission constitutes a zoning violation and is subject to a fine of \$100.00 per day per offense until corrected.

Violations include, but are not limited to, undertaking any work other than Routine Maintenance without securing approval in the form of a Certificate of Appropriateness or executing work in a way other than that which was approved or which does not meet the guidelines.

“After the fact” Certificate of Appropriateness applications are applications for work that has already begun or been completed without an approved Certificate of Appropriateness. *All* “after the fact” Certificate of Appropriateness applications, Minor or Major, will be processed as Major Work applications, must be reviewed by the Commission and may be subject to penalties and a demand to reverse the work if unapproved.

Fraudulent Certificate of Appropriateness applications, if approved under misleading conditions, may be revoked at any time by staff or directed by the HPC. Work executed under a fraudulent COA application is subject to the same violations and penalties as work executed without a COA.

Certificates of Appropriateness determined to have been approved in error by staff, HPC or significant procedural error may be recalled for review by the Commission no later than at the following regular HPC meeting. Work executed under this condition is not subject to penalties, but may be required to be reversed if not ultimately approved.

D. Appeals

Appeals of decisions of the Historic Preservation Commission are made to the City’s Board of Adjustment. An application for appeal should be filed with the Inspections Department within fifteen (15) days after the decision of the Historic Preservation Commission. According to N. C. G. S. Section 160A-400.9 and the commission bylaws, appeals are in the nature of “certiorari,” a legal term meaning that the aggrieved party feels that the Commission did not follow its rules and procedures properly in reaching its decision. The applicant should file an appeal containing a statement of the facts necessary to understand the issues presented by the appeal, a statement of the reasons why the Board of Adjustment should consider the appeal, and copies of the minutes of the commission meeting in which the application was denied. The Board of Adjustment rules only on Commission procedure and will look at the record of the meeting to determine whether or not the Commission found sufficient factual evidence to support its decision. The Board of Adjustment does not rule on the appropriateness of the design. *Appeals of decisions of the Board of Adjustment are filed with the Superior Court of Lee County.*

III. SANFORD'S HISTORIC NEIGHBORHOODS

III. SANFORD'S HISTORIC NEIGHBORHOODS

A. Introduction

The Rosemount-McIver Park Historic District comprises two residential neighborhoods adjoining downtown Sanford, North Carolina, encompassing an area of approximately eighty acres and includes 151 historic structures. The district is bounded on the northeast side by North Horner Boulevard (US 421), a four-lane thoroughfare created ca. 1960 from the pre-existing Endor Street; on the southeast side by modern development lining Carthage Street; and on the southwest and northwest sides by residential neighborhoods that developed largely after World War II. The district is anchored on its south end by the 1930s Lee County Hospital Nurses Home at 112 Hillcrest Drive, a building listed on the North Carolina State Historic Preservation Office Study List of properties that appear to be individually eligible for the National Register of Historic Places. A single city block comprising noncontributing buildings and parking lots separates the district from the Downtown Sanford Historic District, located to the east, which was listed in the National Register of Historic Places in 1985. North Horner Boulevard separates the district from the potential North Steele Street Historic District, which includes a small portion of the original historic Rosemount neighborhood, and which was placed on the North Carolina Study List in 1992. Also located across North Horner Boulevard at 507 West Weatherspoon Street is the 1924 Sanford High School, listed in the National Register of Historic Places in 1995. St. Clair School, another Study List property, stands just to the west of the district at 526 Cross Street and has been converted to the "Clairemont Green" town home development.


Rosemount is the older of the district's two neighborhoods. Its orthogonal grid, laid out about 1910, follows the northwest-southeast orientation of Sanford's downtown streets, and its rolling topography rises towards the northwest. North Horner Boulevard and North Gulf Street run the length of the neighborhood, linked together by the following cross streets (listed from southeast to northwest): Gordon Street, Summitt Drive, Green Street, Cross Street, West Chisholm Street, Bracken Street, and West Weatherspoon Street. McIver Park, laid out in the mid-1920s, occupies the lower ground to the southwest of Rosemount, and its two curvilinear streets – Summitt and Sunset Drives. Sunset Drive follows the line of Dry Creek, a tributary of Buffalo Creek and the Deep River, the banks of which have been developed into a small linear park that was originally intended to feature walkways and foot-bridges. On the bluff above the creek extends Hillcrest Drive, McIver Park's third principal thoroughfare, which formerly incorporated a landscaped median at its junction with Carthage Street (the widening of the street where this median was situated is still evident). Pillar-like brick and granite gateways survive at the entrances to the development on Sunset, Summitt, and Hillcrest Drives (the gateways on Hillcrest are located outside the district and now missing its original lighted center pillar). The gateway at Sunset and Vance once supported lighting on the inner pillars. Vance Street was completed by the early 1940s, filling in the area between McIver Park and Rosemount.


Although Rosemount and McIver Park have distinct origins, they share a similar architectural character owing to the overlapping period of their development and to their status as Sanford's most fashionable residential area for the period between the World Wars. The district's housing stock is accordingly of high caliber architecturally, with the majority of houses designed in the locally popular styles of the period, among them the Queen Anne, Craftsman, Colonial Revival, and Tudor Revival styles. The houses are one story, story-and-a-half, or two stories in height, ranging in scale from compact bungalows and cottages to manorial Tudor and Colonial revival residences. Frame, brick, brick tile, and brick veneer construction are typical, with weatherboard, wood shingle, and synthetic (asbestos, aluminum, and vinyl) claddings standard for the frame dwellings, and decorative brickwork not unusual for the finer masonry houses. House forms are also generally typical of the period, with "I houses," asymmetrical late Victorian compositions, bungalows (side-gabled and gable-fronted), four-squares, Cape Cods, and "period cottages" predominating.

Historic outbuildings include garages, workshops, and storage sheds of frame, brick, and brick tile construction. Most lots are landscaped and are bordered or backed by a mix of pines and deciduous trees, giving the district a wooded character. Several landscaping schemes have their origins during the historic period, and include azalea beds, concrete, brick, and flagstone walkways, and retaining walls constructed of brick, quartzite rocks, or rubble from Sanford's numerous brownstone quarries. The district is notable for its high ratio of historic resources high in integrity. Eighty-six percent of the primary resources (mostly single- and multi-family dwellings) are listed as contributing, as are seventy percent of secondary resources (mostly detached garages and sheds).

Noncontributing resources are principally post-World War II infill residences which contribute to the overall historic fabric of the district.

Rosemount - McIver Park Local Historic District

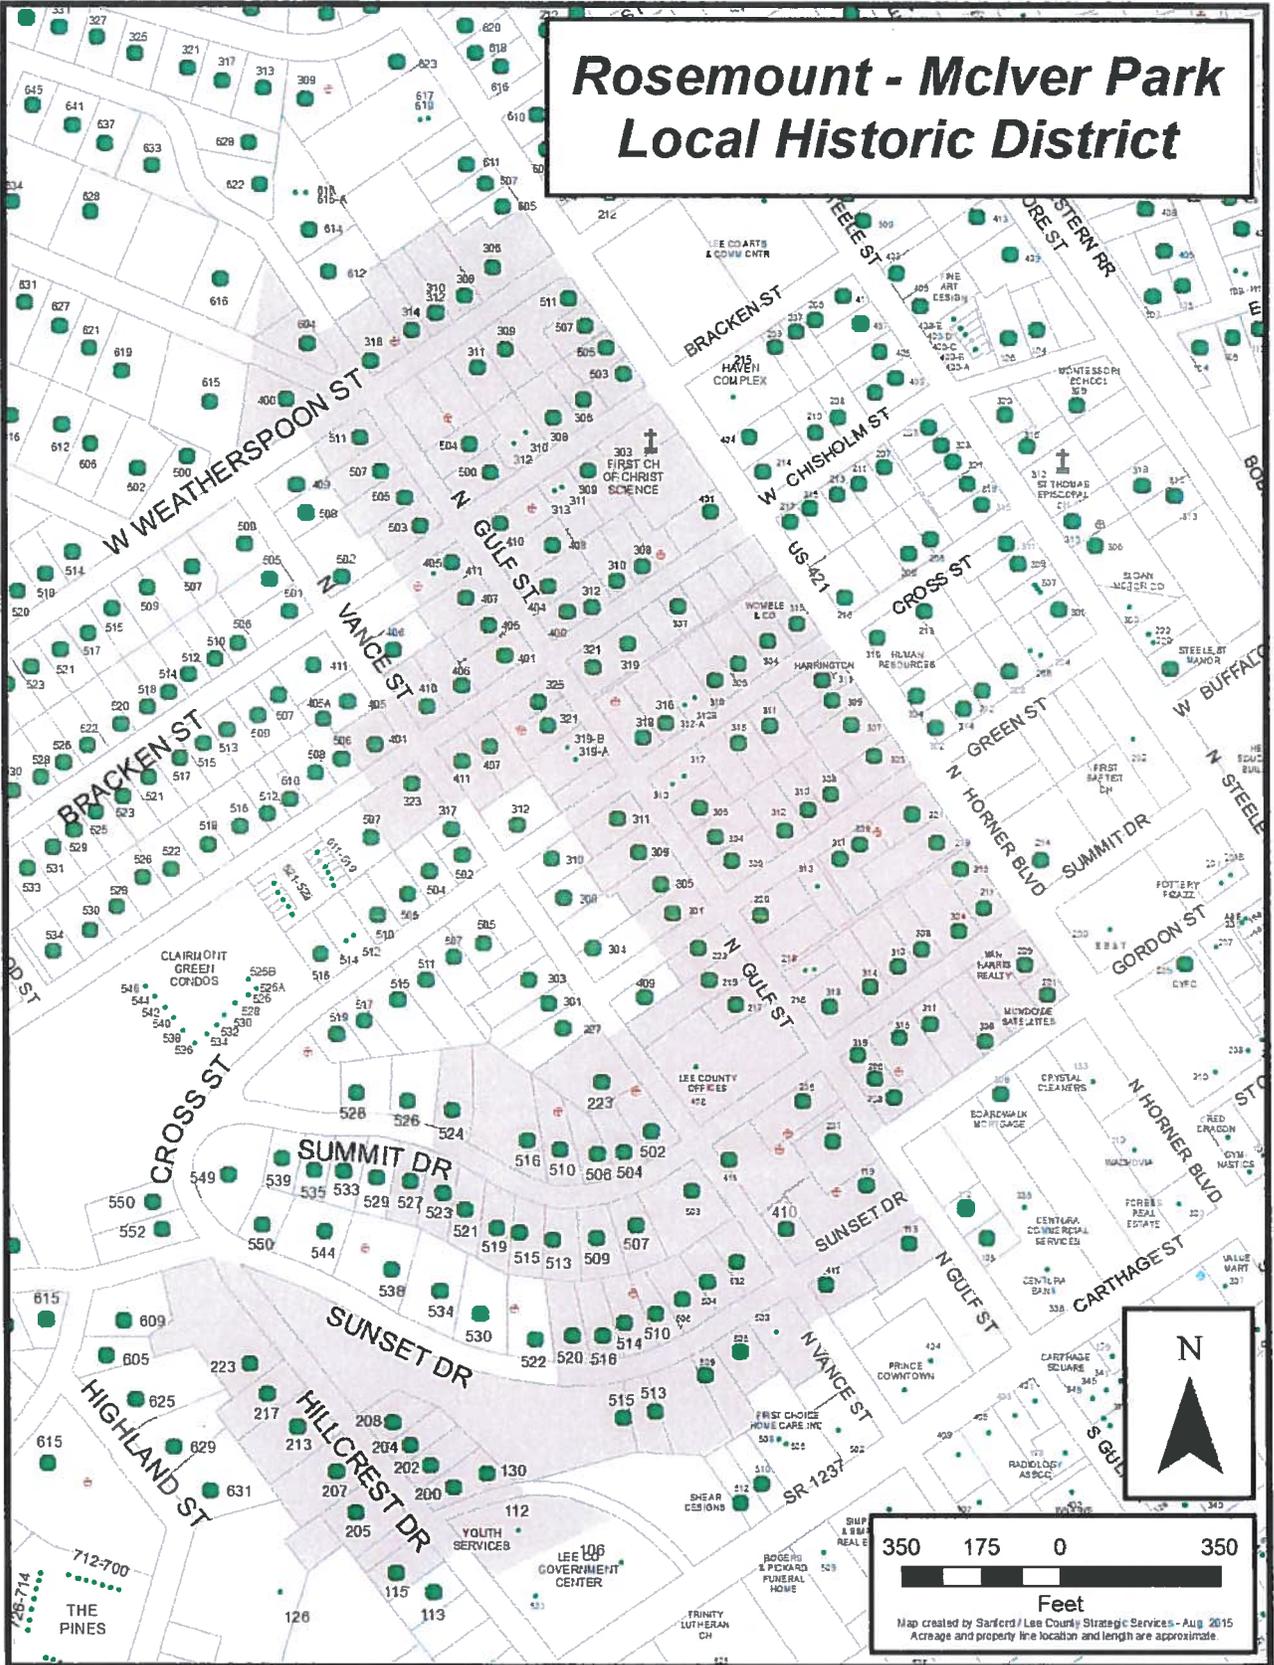

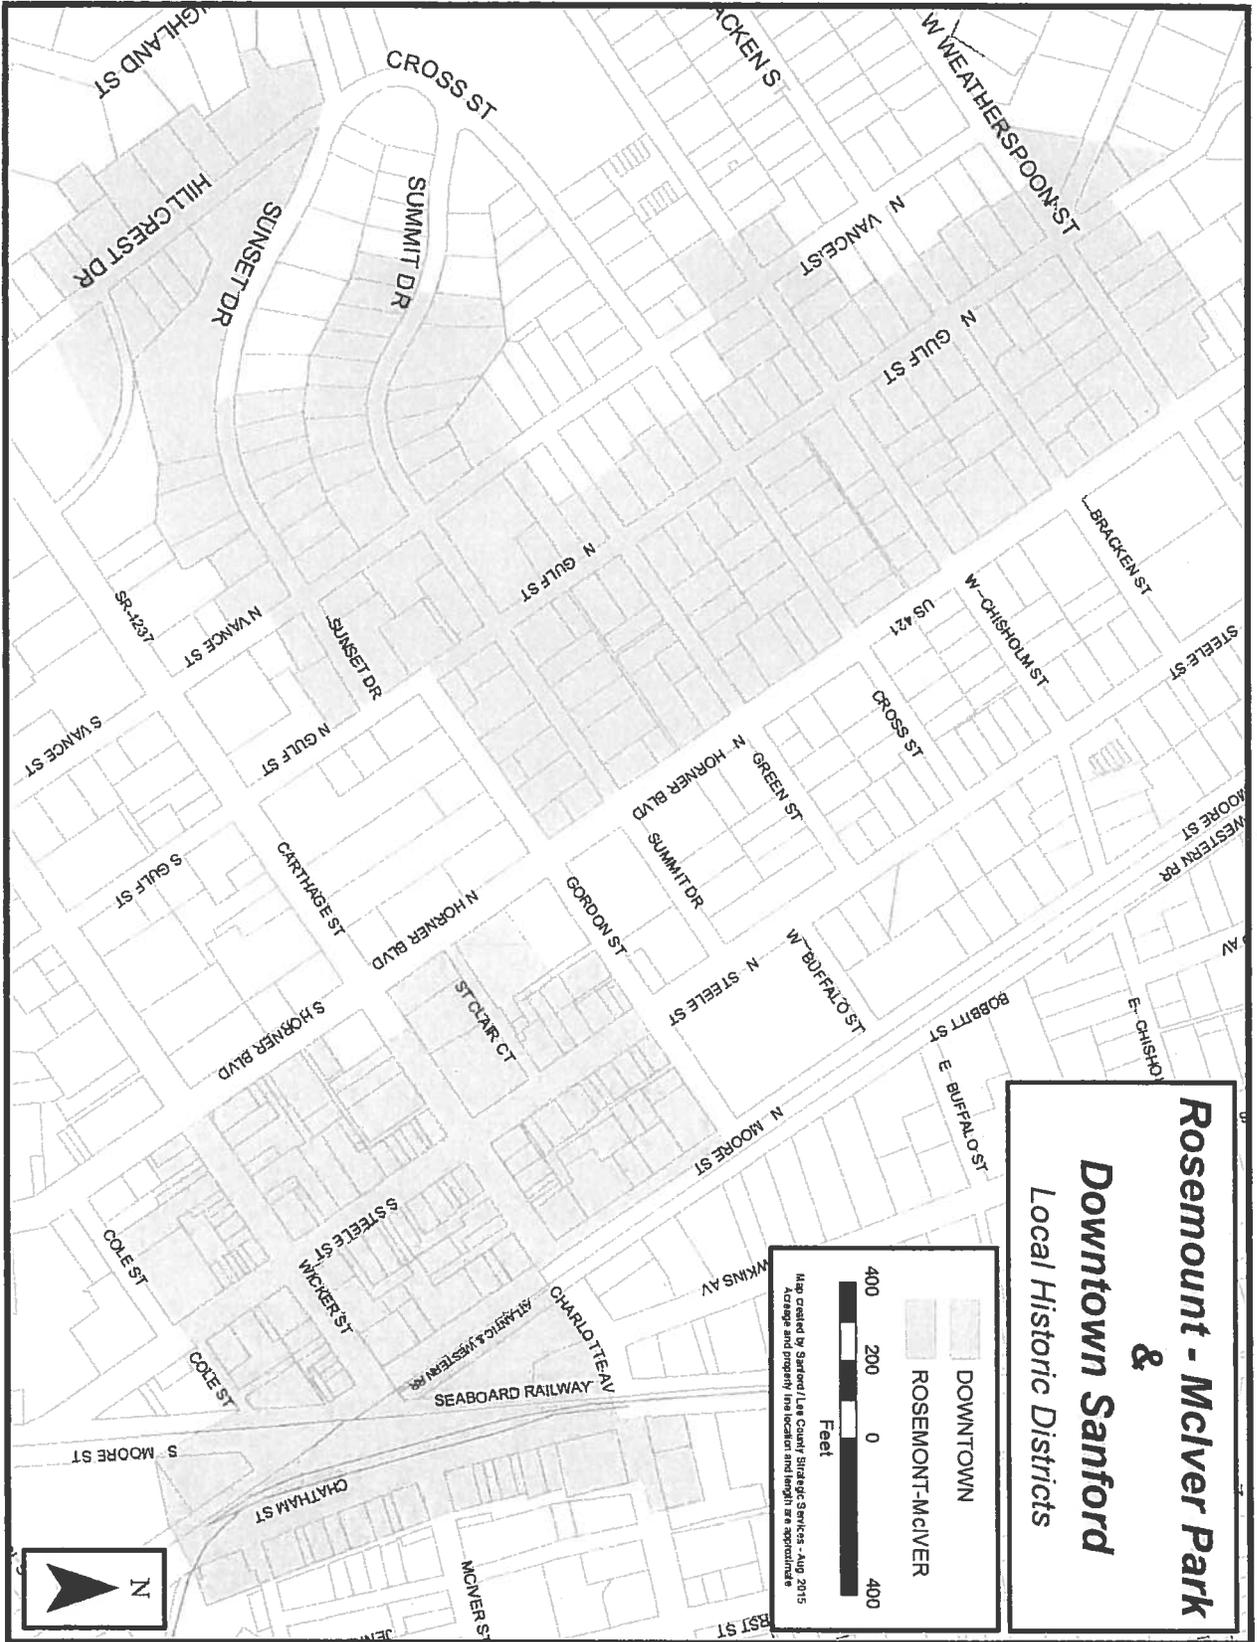

**Rosemount - McIver Park
&
Downtown Sanford**
Local Historic Districts

DOWNTOWN
 ROSEMONT-MCIVER

400
 200
 0
 400
 Feet

Map created by Sanford/Lee County Strategic Services - Aug. 2015
 All maps and property lines located and digitized by Esri.com/arcgis.com

B. Rosemount McIver Park District Historic Architecture

Introduction

The following sections describe the four types of residential building styles found in Sanford's Rosemount McIver Park historic district.

1. Queen Anne (1875-1915)

Popular during the Victorian period, the Queen Anne style is characterized by irregular shapes and complex arrangements of parts. The exterior of a Queen Anne house can be quite elaborate in its use of surface materials and detailing. Originally, multiple color schemes further enhanced the variety of materials used.

Surviving examples of the Queen Anne are usually simplified versions of the style, however. These houses are composed of an asymmetrical mass covered with a hipped or gabled roof, with projecting wings and bays. They feature broad verandahs that wrap around two and sometimes three sides of the house. Porches can often be quite decorative with intricately carved posts and railings, fashioned on a lathe. This trim is commonly referred to as "gingerbread." More recent houses will often have round, classical columns.



The gable ends of most Queen Anne houses are covered with patterned wood shingles, and occasionally a band of wood shingles separates the first and second stories. Wood clapboard is the most common siding material.

Windows are tall and narrow, contributing to a strong vertical emphasis. Window patterns can often be a clue to the period of construction. A two-over-two window sash division suggests a fairly early house, while one over-one indicates a later structure. Leaded or stained glass is often used decoratively for windows and doors. A trademark of the Queen Anne is a window with a border of small panes, often with colored glass, around a large pane. A small casement window of this design is often found in the gable end.


Complex color patterns were often used on the exterior of the house. Architectural details were highlighted and emphasized with color. Even on a fairly modest example of the Queen Anne, the body, trim, shutters and sash were all treated differently, and it was not uncommon for three or four contrasting but harmonious shades to be used on one house.

While the Queen Anne is usually a two-story house, a one-story version is also common. This house incorporates the plan and some of the detailing of its two-story counterpart, and is often referred to as a Queen Anne cottage.

The Triple-A Farmhouse, which was popular in the Piedmont at the turn of the century, was often embellished with Queen Anne trim. This is a simple house, with a central-hall plan. The house gets its name from the roof, which is composed of two end gables and a central gable facing the front. Ornamentation is usually limited to turned and sawn work porch details.



Queen Anne Cottage

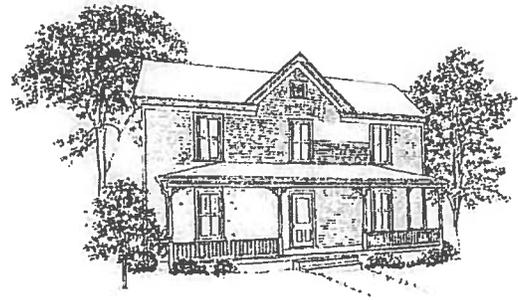

Triple-A Farmhouse

2. Revival Style (1900-1930)

The first part of this century saw a revival of interest in many building styles of Europe and colonial America. In part, the public was reacting to Victorian excesses in architecture. Typically, early twentieth century houses were distinguished by a general symmetry in the arrangement of their parts and by the exercise of restraint in architectural ornamentation.



Tudor Revival



Dutch Colonial Revival

The Neo-Classical Revival style emphasized classical forms. Key elements included round porch columns inspired by the classical orders, cornices with modillion blocks or dentil molding, and pediments. Colonial Revival houses employed the basic plan and details of the originals but on a much larger scale. For example, the Tudor Revival style was a romantic interpretation of the architecture of medieval England.

Windows of the revival styles often have multiple light divisions, and shutters and transom lights are common. Instead of a full front porch, there may be a front portico and a side porch with matching details.

3. Bungalow (1905-1930)

By far the most common historic house style in Sanford is the bungalow. The style originated in California at the turn of the century, and spread eastward with the help of pattern books. The bungalow was an enormously popular house for the middle classes because of its practical features.

The long, narrow shape of most bungalows was ideally suited to the 70 foot by 150 foot lots of typical 1920's subdivisions. Narrow lots allowed the developer to take maximum advantage of the newly available public infrastructure: paved streets and sidewalks, water and sewer lines, electrical and telephone service, and public transportation.

Bungalows are normally single story houses, although they can be one and a half stories. They usually have gently sloping gable or hip roofs with wide overhanging eaves. Roof beams and rafters are almost always exposed.

A common bungalow form has the gable end facing the street, with the gabled porch roof set to one side. Occasionally the roof will be brought forward to cover the front porch. "Knee" brackets supporting the roof are a common feature.



Bungalow (Chalet Type)



Bungalow (One Story)

Some bungalows are more correctly labeled Craftsman houses. Craftsman houses were influenced by the Arts and Crafts movement which flourished in California in the early part of the twentieth century. The design philosophy accompanying this movement emphasized the relationship between man-made structures and their natural surroundings. Craftsman houses have two stories and are constructed with natural materials such as native stone. Wood shingles (either left unpainted or stained rich, dark colors) were used for siding and roofs.

4. American Foursquare (1905-1930)

The term “American Foursquare” was coined in recent years to make a category for all of those charming two-story, box-shaped houses that fill early twentieth century neighborhoods across America. Like the bungalow, the American foursquare reflected a trend toward simplicity and efficiency in residential construction. It was a practical house because it provided ample living space on its two floors, requiring only a minimum amount of land.

Hip roofs with deep overhanging eaves are typical of the American foursquare. The eaves are either open like the bungalow, or closed if the house is influenced by some other style. Construction materials and detailing are often similar to the bungalow, but details were borrowed from various styles including the Neo-Classical, Colonial Revival and even Frank Lloyd Wright’s Prairie style.



Four Square with Colonial Revival Detailing



Four Square with Queen Anne Detailing

IV. DESIGN REVIEW GUIDELINES

A. Purpose

In reviewing applications for Certificates of Appropriateness, the Historic Preservation Commission will refer to the Design Review Guidelines for the appropriate district. These guidelines are written to assist the property owner in designing and making decisions about compatible improvements to properties in local historic districts and to locally designate historic properties. The guidelines are also intended to educate the public about the philosophy of historic preservation. They also provide criteria by which the Historic Preservation Commission may evaluate the appropriateness of such improvements.

The Commission will always assess a project according to its adherence to the guidelines and will make all efforts to be consistent in its rulings. The guidelines are not laws written in absolute terms, but rather are general rules that will hold in most cases. The Commission has the authority to examine “the whole situation,” or extenuating circumstances (such as safety considerations), and approve projects that do not meet the absolute letter of the guidelines. When the Commission does grant exceptions to the guidelines, it will clearly document why it has done so. In considering applications for Certificates of Appropriateness, the more historically or architecturally significant the structure, the more concerned the Commission will be that the exterior appearance of the structure retain its exact historic integrity and character. Also the more visible the project will be from a public right-of-way, the greater will be the Commission’s concern.

The Secretary of the Interior’s Standards for Rehabilitation, which follows, has been developed as general guidelines for preservation of older buildings. These standards are also used relative to income producing properties to determine if a rehabilitation project qualifies for “certified rehabilitation,” thus becoming eligible for federal and state income tax credit. The Design Review Guidelines are based on and used in conjunction with these general standards:

- 1. A property shall be used for its historic purpose or be placed in a new use that requires minimal change to the defining characteristics of the building and its site and environment.*
- 2. The historic character of a property shall be retained and preserved. The removal of historic materials or alteration of features and spaces that characterize a property shall be avoided.*
- 3. Each property shall be recognized as a physical record of its time, place, and use. Changes that create a false sense of historical development, such as adding conjectural features or architectural elements from other buildings, shall not be undertaken.*
- 4. Most properties change over time; those changes that have acquired historic significance in their own right shall be retained and preserved.*
- 5. Distinctive features, finishes, and construction techniques or examples of craftsmanship that characterize a property shall be preserved.*
- 6. Deteriorated historic features shall be repaired rather than replaced. Where the severity of deterioration requires replacement of a distinctive feature, the new feature shall match the old in design, color, texture, and other visual qualities and, where possible, materials. Replacement of missing features shall be substantiated by documentary, physical, or pictorial evidence.*

7. *Chemical or physical treatments, such as sandblasting, that cause damage to historic materials shall not be used. The surface cleaning of structures, if appropriate, shall be undertaken using the gentlest means possible.*
8. *Significant archaeological resources affected by a project shall be protected and preserved. If such resources must be disturbed, mitigation measures shall be undertaken.*
9. *New additions, exterior alterations, or related new construction shall not destroy historic materials that characterize the property. The new work shall be differentiated from the old and shall be compatible with the massing, size, scale, and architectural features to protect the historic integrity of the property and its environment.*
10. *New additions and adjacent or related new construction shall be undertaken in such a manner that if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired.*

B. Landscape Features

In the original development of historic district neighborhoods, landscaping was designed to link buildings with their surroundings and often create soft edges where public and private property meet. Historic elements of the landscape, including fences of wood or wrought iron, retaining walls, lighting, curbing, sidewalks, street furniture, gazebos, arbors and trellises should be protected and preserved where possible.

1. Public Right-of-Way

The City of Sanford maintains the public property in historic districts. This property may include areas such as the median strips, public parks, sidewalks, streets, and the planting strips between the sidewalk and the street.

Although the public areas have evolved over time, much of their historic character remains. The following guidelines apply to the City of Sanford for all work in the public right-of-way. Please consult with the Planning Department and city code for any questions regarding specific definitions and dimensions of the public right-of-way which can be dependent on location and other factors such as street type.

Guidelines

- a. It is preferable that new benches, trash receptacles, fountains, and other street furniture should be compatible with the historic character of the neighborhood in size, scale, material, and style.
- b. It is appropriate to locate large trash receptacles (dumpsters) at the rear of the property, along an inconspicuous side of a building, or screened by fences, walls or evergreen vegetation.
- c. It is preferred to maintain the existing topographical character of the neighborhood.

- d. It is appropriate when technically feasible, to maintain historic street patterns, street widths and street cross-section profiles. Sidewalks are encouraged. Replacement of granite curbs with concrete is not allowed.
- e. It is appropriate for tree trimming to be done in a manner that encourages the preservation of the district tree canopy. The practice of tree topping and rounding off is discouraged.
- f. It is preferred to maintain and install grass/ planting strips between sidewalk and street.
- g. It is appropriate to reinforce the neighborhood canopy. Appropriate trees should be planted to avoid damage to sidewalks, curbs, and retaining walls. New trees and plantings should replace older vegetation and should be properly maintained. All stumps of street trees shall be removed below the surface of the ground so that the top of the stump shall not project above the surface of the ground, and the surface shall be restored to its original condition as is reasonably practical.
- h. It is preferable not to attach electrical, telephone, and television cables to the principal elevation of a historic building. Whenever possible, utility wires should be placed underground.
- i. It is appropriate to minimize signage in the public right-of-way, except for that required for traffic and safety, it should be kept to a minimum and should not interfere with the historic character of the neighborhood.

2. Landscaping and Trees (Private Residence)


Mature trees, shrubs and ground cover help to define and enhance the character of a historic district. Turn of the 20th century gardens often advocated a natural look, comfortable, settled and peaceful rather than the stylized gardens typical of the 18th century.

Historic districts are typically shaded by a heavy tree canopy, which adds great aesthetic appeal. At the turn of the century, trees were placed in a manner to have an impact in cooling the structure.

Guidelines

- a. It is appropriate to protect, retain, and maintain landscaping that contributes to the character of the historic district. This includes large trees and original or historically significant trellises, patios, terraces, and fountains.
- b. It is appropriate to preserve, protect and retain historic hardscape materials, such as brick or granite pavers. If replacement is necessary, use materials that match or blend with original material in color, texture and, pattern.

- c. It is inappropriate to introduce gazebos in front yards. Gazebos should be compatible in materials, design, form and scale with the general character of the historic neighborhood. (See Appendices VI)
- d. It is not appropriate to install playground equipment in front yards or the street side yards of corner lots. Playground equipment is often a modern addition to properties in historic neighborhoods and therefore cannot be considered historically accurate in most installations. Every effort should therefore be made to make playground equipment compatible in scale with the neighborhood and primary structure and as aesthetically unobtrusive as possible. Introduce playground equipment inconspicuously in areas that are not visible from the street, usually in the rear yard. If not possible, make an effort to screen with vegetation or similar methods. Historic playground equipment should be maintained.
- e. It is appropriate to maintain the existing grade on the site when technically feasible.
- f. It is appropriate that mature, healthy trees should remain intact and undisturbed on a site, unless they are causing the deterioration of a building, accessory buildings, appurtenant features or creating a safety hazard.
- g. Trees which are dead or diseased should be replaced with an appropriate tree. Evaluation of the tree's condition must be made by a certified arborist, landscape architect, designated city or county resource.
- h. Tree removal shall be completed in a manner so that the affected area seems original to the landscape.
- i. Tree trimming should be done in a manner to encourage the maintenance of the neighborhood tree canopy. Tree topping is discouraged.
- j. Landscape timbers, cinder blocks, railroad ties or telephone poles & masts are not allowed in the construction of raised planting beds.

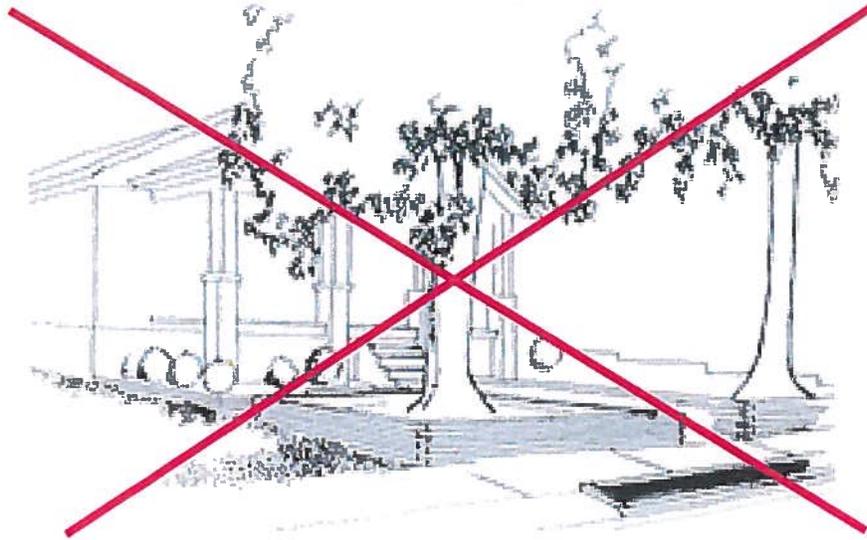

INAPPROPRIATE USE OF LANDSCAPE TIES

- k. Regular (not incidental) parking on the front, side yard or any other landscaped area easily viewed by the public is prohibited, unless a designated parking area or lot.

3. Appurtenant Features

Appurtenant features, those structures which define or surround the site of a building, should be given the same consideration as given the building itself. These features, including walkways, driveways, fences, signs, and lighting, help to create an orderly visual quality.

Guidelines

- a. It is appropriate to maintain original site features such as walkways, walls, formal and informal gardens, fountains, gazebos, and trellises.


4. Walks, Steps and Driveways

Walkways and steps constructed of cement, stone, or brick are important features of the historic district and provide visual unity. Most historic district houses feature wide straight front walks leading directly from the public sidewalk to the front door of the structure. Please refer to pages 37-39 for more information pertaining to driveways.

Guidelines

- a. Historic paving configurations and materials should be maintained. New paving for walkways, steps, alleys and driveways should match and/or blend whenever possible to historic materials, design and scale.
- b. Handrails on steps along a walk should be compatible in materials and style of neighborhood structures.
- c. New walks, steps and driveways should minimize changes to existing landscape features such as retaining walls and major landscaping.

Concrete or brick steps are provided where the building lot is elevated above the level of the street.

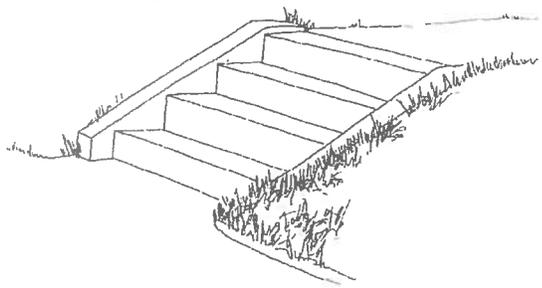

- d. Circular driveways in the principal elevation are not appropriate unless demonstrated to be historically accurate for the site.
- e. Driveway aprons are required for driveway entrances/exits.

5. Terraces and Patios

A terrace is defined as a raised, paved, or planted horizontal area next to a building. A patio is defined as a flat structure that is located on grade next to a structure.

Guidelines

- a. The location of a terrace or patio should complement the character of the site and the historic structure.
- b. A terrace or patio should be designed so that it can be built or removed without damage to the historic structure, historic landscaping or adjoining properties.
- c. Appropriate paving materials include but are not limited to: stone, brick, concrete or tile. The choice of materials should complement the adjoining historic structure.

6. Swimming Pools / Hot Tubs

Swimming pools are often modern amenities.

Guidelines


- a. Pools/Hot tubs should be located only in the rear yard.
- b. Pool fencing should follow the guidelines found under "Fences and Walls" within this manual and should screen the pool or hot tub from the public view. Vegetation can be used to soften the visual impact of the fence.
- c. A pool/hot tub should be designed so that it can be built and removed without damage or alteration to the historic structure.
- d. Preserve, protect and retain historic pools. If repairs are necessary, use materials which match the historic material in composition, size, shape color, pattern and texture.

7. Accessory Structures

The private garage, evolving from the carriage house and horse barn outbuildings of the 19th century, was modified in the early 1900s to store an automobile. The earliest garages were simple frame structures with no finished floor, and often could only accommodate a single automobile.

Guidelines

- a. It is appropriate to preserve, protect, maintain, and retain original outbuildings (storage buildings, garages, carports, greenhouses, gazebos, sheds, detached kitchens, well houses and outhouses).
- b. It is appropriate to preserve, protect and retain all architectural materials and features that are character-defining elements of garages and outbuildings, including foundations, steps, roof form, windows, doors, architectural trim, and lattices. Replacement materials should be congruous with historic materials in composition, size, shape, color, pattern and texture.
- c. Replacement of garages should be built upon the same basic footprint of the lost structure and be congruous to the historic district.

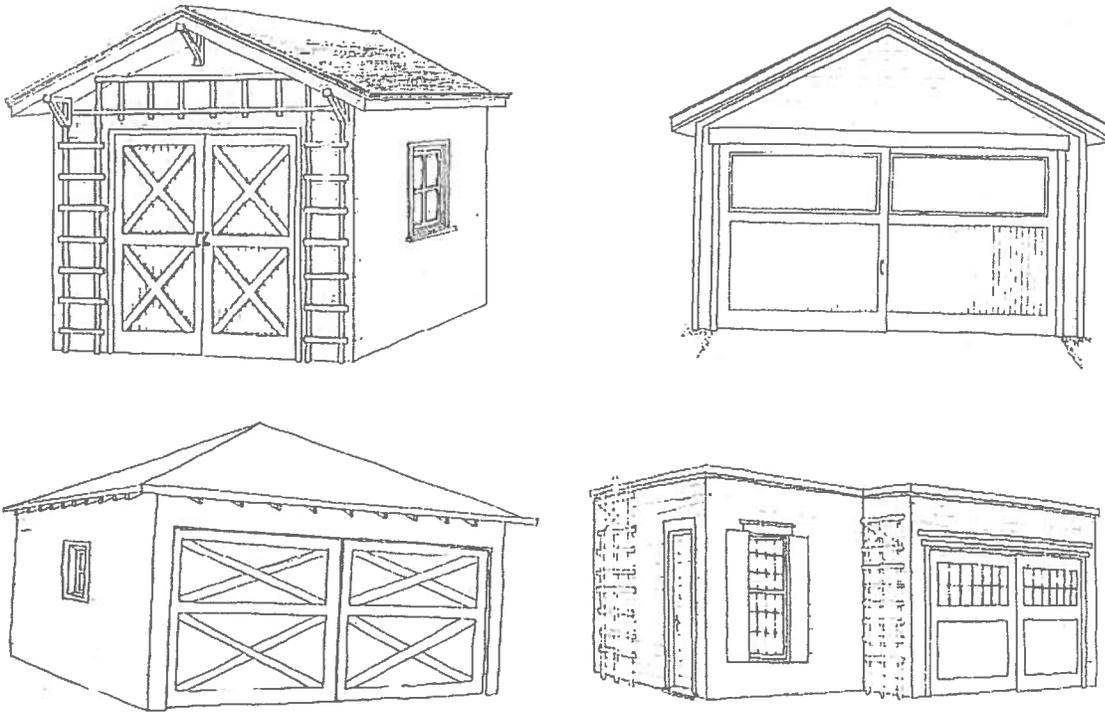

Examples of some of the original garage structures found in historic districts.

8. Parking Areas & Lots

Section 8 becomes effective January 1, 2016. The ordinance amending the City of Sanford Unified Development Ordinance (2015-28) adopted April 7, 2015 may be found in Article 4, Section 4.12.7 and renamed Off-Street Parking.

Refer to *Section: Walks, Steps and Driveways (page 34 a thru e.)*

A. Off-Street Parking Requirements for Rosemount McIver Park District

1. Vehicles shall include motorized and/or towed equipment that is designed to travel upon a street or highway and shall include any automobile, bus, truck, tractor, motor homes/RVs, mopeds, all-terrain vehicles, recreational vehicles, golf carts, go-carts, trailers, campers or other similar devices.

B. Vehicle Surface Area

Vehicle surface areas shall include the driveways and parking areas for vehicles as located on private lots, outside of a street right-of-way. Vehicle surface areas shall conform to the following standards:

1. Vehicular surface areas shall be constructed of permanent, non-erodible surface treatment, which may include porous and semi-porous monolithic or paver materials, masonry or concrete pavers, poured concrete and asphalt, or constructed with a minimum depth of 4 inches of crushed stone or crush and run. Parking on grass, dirt or similar erodible surface is prohibited.
2. The borders of any vehicular surface area constructed of crushed stone or crush and run shall be delineated with edging materials such as but not limited to: decorative concrete, brick, anchored steel edging, small walls built of brick, stone, etc. such that the vehicular surface area is clearly defined and helps to contain the crushed stone or crush and run. Concrete block, plastic edging, landscape timbers, masts and similar edging materials shall not be allowed.
3. Except for circular and semi-circular drives, vehicular surface areas located within the front yard area of a single-unit living in a detached house shall not be located in front of the dwellings primary entrance.
4. No vehicle shall be parked or stored outside of the vehicular surface areas described above within the front yard area with the exception of temporary parking (page 39) and/or vehicles actively and continuously being unloaded, loaded, washed or repaired (in a non-commercial manner).
5. All vehicular surface areas shall be maintained in good and safe condition and be free of holes, cracks or other failures that may affect the use, safety, appearance or drainage to an adjoining property.
6. The minimum width for a residential and commercial driveways is 10 feet and the maximum width is 16 feet.

C. Residential Standards for Single-Family Dwellings

Vehicular surface areas located within the front yard areas of single-family dwellings shall comply with the following:

1. Residential lots for single-family dwellings shall comply with the standards stipulated in Vehicle Surface Area (a - f.)
2. A circular or semi-circular driveway, not to exceed a width of 12 feet, with no more than two access points on the premises shall be allowed.


D. Residential Standards for Vehicle Parking Areas with more than One Dwelling Unit
Vehicular surface areas located within the front yard area of residentially developed lots that include two or more dwelling units shall comply with the following:

1. Residential lots with two or more dwelling units shall be allowed 40% coverage in front yards.
2. Residential lots with two or more dwellings shall be allowed parking pads with a minimum width of 20 feet and a maximum width of 24 feet and a maximum length of 30 feet.
3. Large parking areas and lots should be screened when possible. Perimeter planting areas should be created to minimize the impact of the parking areas or lots on surrounding properties as much as practicable.


E. Non-Residential Standards for Vehicle Parking

Lots developed for non-residential land use shall conform to the following standards:

1. No vehicle shall be permitted to be parked or stored on a vehicle surface that does not meet the standards for Vehicle Surface Area (page 37 a - f.)
2. Required off-street parking shall be provided on site and shall meet the standards set forth in Article 8 of the Unified Development Ordinance with regard to the number of spaces and the dimensional requirements for parking spaces.
3. Non-residential parking areas shall be located in the rear yard if at all possible.
4. Parking areas and lots shall be screened with a Type "B" buffer yard as set forth in Article 7 of the Unified Development Ordinance (UDO). Perimeter planting areas should be created to minimize the impact of the parking areas or lots on surrounding properties as much as practicable.

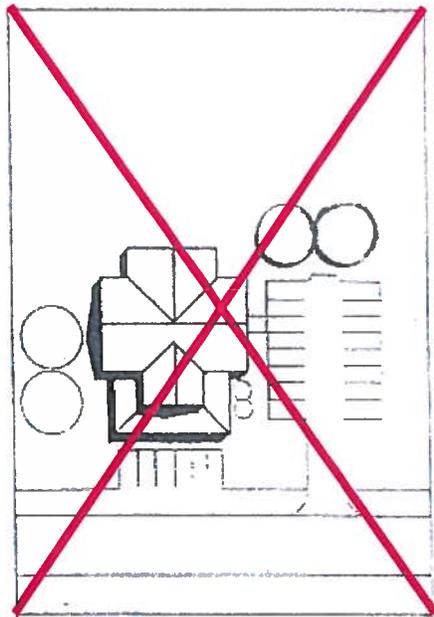

INAPPROPRIATE

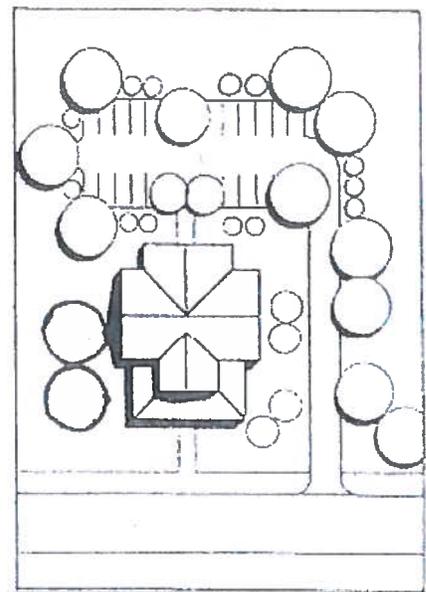

APPROPRIATE

F. Existing Non-Conforming Vehicle Surface Areas

Non-Erodible Surface. Vehicular surface areas lawfully existing prior to the adoption of the Parking Ordinance which do not conform to the Standards set forth on pages 37-38 but are constructed of permanent, non-erodible surface treatment are allowed. However, such areas shall not be expanded or altered except to upgrade vehicular surface area to be in greater compliance with Section 8 of the Guidelines. Routine maintenance and/or repair are permitted and encouraged.

G. Erodible Surface. Vehicular surface areas existing prior to the adoption of the Parking Ordinance that are not constructed of a permanent, non-erodible surface treatment shall not be continued to be used for vehicular parking unless or until said parking area is brought into compliance with Section 8 of the Guidelines as appropriate.

H. New Construction or Expansion

New construction or expansion of parking facilities shall require a Certificate of Appropriateness.

I. Temporary Event Parking

Temporary events shall include family reunions, holiday visitations, weekend residential yard sales and other similar events. As such, temporary event parking shall be allowed under the following conditions:

1. During the duration of a temporary event, parking outside of an improved parking surface (temporary event parking) shall be allowed, so long as the area/surface to be used for parking does not create drainage runoff or other environmental impacts that may negatively affect adjoining properties.
2. Temporary parking for such events shall not extend beyond a maximum of three (3) consecutive days.
3. Temporary event parking shall be limited to a maximum of three (3) occurrences on the same lot within one (1) calendar year.
4. Temporary event parking shall occur no more than once within a 30 day period on the same lot.

Section 8 of these guidelines become effective January 1, 2016. The ordinance amending the City of Sanford Unified Development Ordinance (2015-28) may be found in Article 4, Section 4.12.7 and renamed Off-Street Parking.

9. Lighting

Original fixtures should be maintained and preserved if possible.


Guidelines

- a. It is appropriate to preserve, protect and retain historic lighting when technically feasible. Replacement or new light fixtures and poles should be compatible in design, scale, finish and materials with the structure, landscape and neighborhood setting.
- b. It is appropriate to choose fixtures and illumination levels that do not adversely affect adjacent properties (light beam should be faced downward to prevent light pollution).

- c. Electrical lines to site lighting should be located underground when technically feasible.
- d. It is appropriate to introduce lighting for safety concerns. Consideration for placement should be given to minimize alterations to historic facades and limit visual impact when technically feasible.

10. Signs

Signs are an important visual element in historic districts and at designated historic properties. Structures at the turn of the century were built when walking was the predominant form of travel.

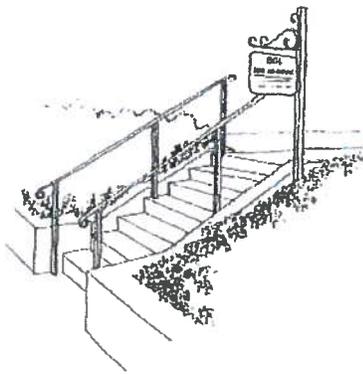

Usually the best location for a sign is next to the front walk near the public sidewalk.



Characteristics which make this an appropriate sign include its rectangular shape, smooth surface sign board, and lettering which evokes the mood of the neighborhood.

Free standing signs of limited size are recommended. If signs must be placed on buildings, a small panel at the entrance is recommended.



APPROPRIATE




INAPPROPRIATE

Guidelines

- a. Materials should be congruous to the historic district.
- b. Signs should not be attached to buildings in ways that interfere with or destroy important architectural features.
- c. Residential identification signs attached to a wall should not exceed one square foot in surface area. Such signs should be flush mounted on the main building in a manner not to obscure architectural features.
- d. All signs shall conform to the existing city sign ordinance. Signs not covered in the city ordinance are restricted to 6 square feet.
- e. Signs may be lighted by reasonably concealed landscaping lighting.
- f. Billboards, portable signs, internally illuminated signs, flashing signs, and lighted message and display signs are examples of inappropriate signage.
- g. Pedestrian-scaled signs that will not overwhelm the architecture and obscure elements, such as cornices and transoms, are recommended


11. Fences and Walls

Traditional front yard fences of that era were made of wood or iron.

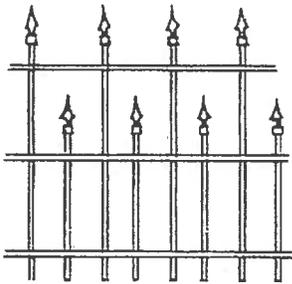


Cast Iron Fence


APPROPRIATE EXAMPLES

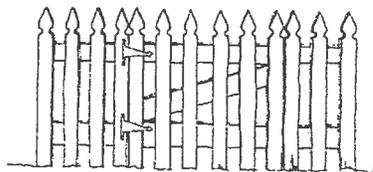


Wood Picket Fence

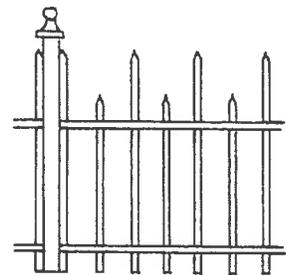


Wood Fence

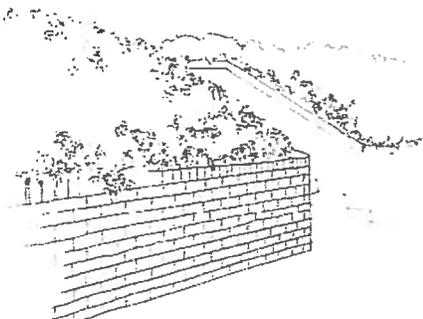

Brick Retaining Wall

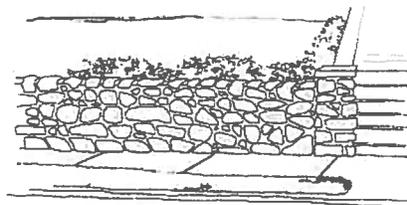


Stone Retaining Wall

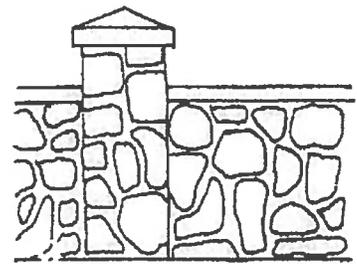


Stone Wall

Guidelines

- a. It is appropriate to preserve, protect and retain original fences and walls. If replacement is necessary, use like-kind when material when possible and appropriate new material when not possible. New Material should blend with the historic material in composition, size, shape, color, pattern, and texture.
- b. New fences or walls should be congruous with the character of the historic district.
- c. It is not appropriate for new fences and walls to exceed a maximum height of forty-two inches in front and side yards, and six feet in rear yards. For rear yard fences continued along the sides of the property, it is acceptable for the six-foot maximum height to extend beyond the rear corner of the house up to one third of the structure's side toward the front. The rear third is measured from the most extreme point of the rear of the structure toward the front.
- d. Fences that extend up the side yards should be no more than 50% solid from the rear plan of the most extreme point of the rear of the structure.

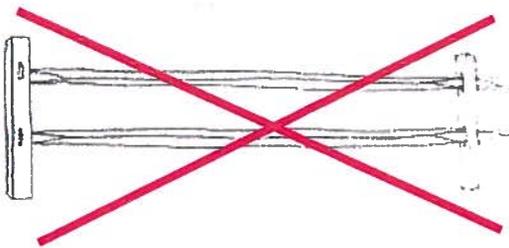


Split-rail is an example of inappropriate fencing for the historic districts.

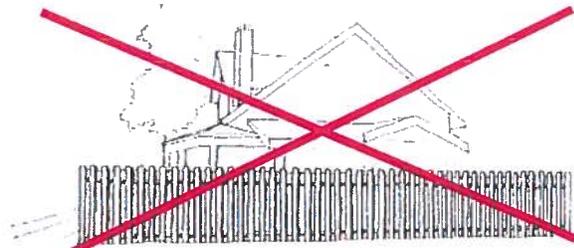

Fences and hedges that block the view of the property from the street are inappropriate.

- e. It is inappropriate to replace existing inappropriate fences (such as chain link) with inappropriate materials and design when significant repair is needed (>50%). Repair by replacement of more than 50% of inappropriate fencing should be completely replaced by appropriate fencing. Existing inappropriate fencing should be camouflaged with vegetation.
- f. The structural member of any fence shall be turned to face the property of the person erecting the fence ("good neighbor fence").
- g. It is appropriate for outdoor garbage areas to be screened. Commercial garbage bins and dumpster containers shall not be visible from the street, and should be shielded from view by approved fencing or evergreen vegetation.

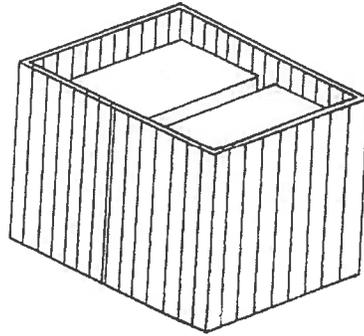

Dumpsters should be screened from public view.

C. Building Exterior

1. Architectural Components and Details

Architectural components, such as fascias, soffits, trim, columns, brackets, porch railings, door/window casings, and architectural details, such as joinery and surface patterns, contribute significantly to the historic character of a structure.

Guidelines

- a. It is appropriate to retain original architectural details if technically feasible. Original exterior features such as cornices, brackets, railings, shutters, siding, window architraves, and doorway pediments are an essential part of a building's character and should not be removed.
- b. It is appropriate to repair and restore deteriorated architectural features. If replacement is necessary, replace with like-kind materials and appropriate new material when not possible the new material should blend with the historic material, design, color, texture, scale and other visual qualities.
- c. It is not appropriate to add architectural components and features that are not appropriate to the historic character of the structure.
- d. It is not appropriate to replace or cover architectural components, such as fascias, soffits and columns with inappropriate materials.
- e. Sandblasting and other abrasive treatments that can damage historic architectural components and details are not acceptable.

2. Foundations

For most houses the foundation is composed of a masonry perimeter wall which bears most of the load, interior piers for supplementary support, and a sill plate which connects the perimeter wall with the wood frame of the house. On some older houses in the historic

district, the foundation was originally constructed entirely of brick piers. At some point in time, brick walls were often added between the piers.

Some conditions require the consultation of a masonry contractor or a structural engineer. These conditions include large cracks that go through the bricks, bulging or sagging walls, bricks not level from one corner to the next, and sagging interior floors and walls.

Maintenance of the foundation includes periodic re-pointing of mortar joints. Severe problems can require replacement of entire sections of a foundation.

Parging is the technique of applying a cement-like coating as an alternative to the repair or rebuilding of a deteriorated foundation.

Guidelines

- a. It is appropriate to maintain and retain original foundations. When a foundation must be repaired or rebuilt, the original bricks or stones should be used when technically feasible or replaced by bricks or stones that are similar in size, color, and surface texture to the original.
- b. It is appropriate to blend new bond patterns and mortar joints when rebuilding a foundation.
- c. It is appropriate to blend repointing of the original mortar joints in design and color. *Also refer to Section C3: Masonry for details on repointing.*
- d. It is not appropriate to use exposed cinder block and formed concrete foundations.
- e. Openings between brick piers may be filled in with matching masonry materials or lattice.
- f. Painting previously unpainted foundations, sandblasting, parging and waterproofing the exposed parts of foundations is inappropriate.
- g. It is appropriate to blend new foundations vents when installation is required.
- h. It is appropriate to locate access doors to the foundation in an area not visible from the principal elevation.


3. Masonry

Brick or stone masonry is an important component of most old houses, and a source of permanent beauty. Original or early masonry materials, which have a weathered, time-worn appearance, should be preserved wherever possible. Cleaning masonry with the gentlest means possible is recommended only when determined that the dirt is actually accumulated deposits and not simply the effects of weathering.


Repointing, which means removing old mortar and replacing it with new mortar, is necessary when there is evidence of moisture problems or when sufficient mortar is missing. It is a process that should be taken with the utmost care with a professional experienced in historic preservation to avoid smearing mortar on the surface of the brick or damaging the brick through mortar removal or incorrect compression.

Guidelines

- a. It is appropriate to preserve, protect and retain original masonry and masonry design features that are character-defining elements of historic buildings, including bond patterns, cornices, moldings chimneys, arches, quoins, and pediments.

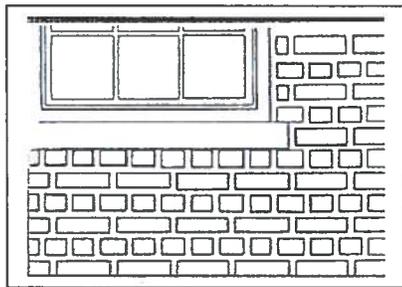

APPROPRIATE

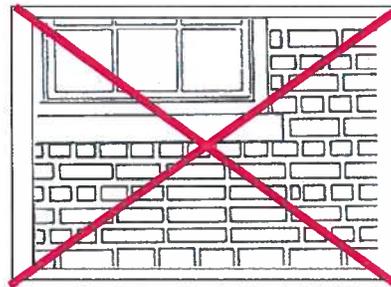

INAPPROPRIATE


- b. It is appropriate to preserve, protect and retain historic masonry materials whenever technically feasible. If replacement is necessary, use like-kind materials when possible and appropriate new materials when not possible. New materials should complement historic materials in composition, size, shape, color, pattern, and texture.
- c. It is appropriate to blend and match products to the existing mortar materials in appearance, texture, and color
- d. It is appropriate to use water repellent coatings on exposed masonry to solve a specifically identified problem. For example, sandblasted brick may be so porous that some type of coating is essential.
- e. It is not appropriate to apply stucco, parging or use other similar masonry coatings to masonry unless these coatings were originally used on the building.
- f. It is appropriate to repair original stucco with a stucco mixture duplicating the original as closely as possible in appearance and texture.
- g. It is not appropriate to paint previously unpainted masonry.
- h. It is appropriate to retain and maintain the original or early color and texture of masonry surfaces. Brick or stone surfaces may have been painted or whitewashed for practical or aesthetic reasons. Indiscriminate removal of existing paint from masonry surfaces may subject the building to harmful damage and may give it an appearance it never had.

- i. It is not appropriate to cover masonry with siding.

4. Chimneys

Original chimneys are significant features of historic houses and should be preserved.

Chimney with brick corbelling at the top

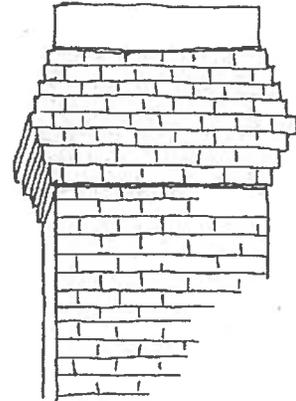


Guidelines



- a. It is appropriate to preserve, protect and retain the design of original chimney masonry. Brick corbelling, clay chimney pots, or other original features should be repaired rather than removed. Special care should be taken to ensure that repairs blend in composition, size, shape, color, pattern, and texture.
- b. It is not appropriate to parge or use incorrect materials to re-point deteriorated chimney masonry.
- c. It is appropriate to remove chimneys or furnace stacks added after the original construction if the historic appearance of the structure will otherwise remain unchanged.
- d. Metal caps are acceptable; they should be unobtrusive and not alter the design of the chimney. The design of the chimney cap should be chosen in context to the architecture of the house and the materials of the chimney new materials shall blend with historic materials in composition, size, shape, color, pattern, and texture.
- e. It is appropriate to preserve, protect and retain original flashing design such as step flashing.

5. Roofs

The roof form and pitch are among the major distinguishing characteristics of the different styles of architecture.

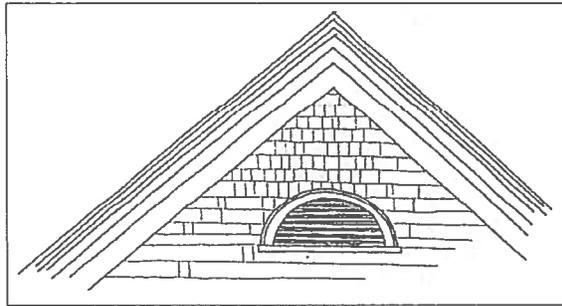

Many old houses have louvered wood gable vents with trim to match the windows. They should not be replaced with metal substitutes or windows, and any new vents that are added should match the existing vents.

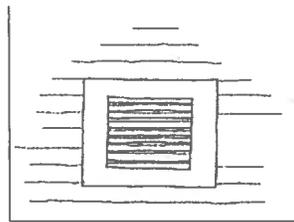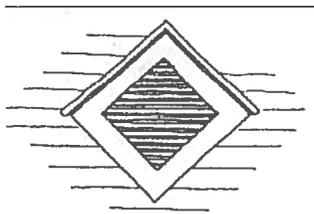

The care and maintenance of the roof is one of the most important practices in preserving a historic building. A leaky roof can accelerate deterioration of historic features at a rapid rate.

Guidelines

- a. It is appropriate to preserve, protect and retain original roof forms, pitches, rafter details, molding, trim, and soffit boards if technically possible.



ORIGINAL



With dormer added. Dormer may be approved if it can be shown to be appropriate for the house.

- b. It is appropriate to preserve, protect and retain historic roofing materials such as clay tiles, slate, standing seam metal, wood shingles or embossed metal shingles when technically feasible.
- c. It is appropriate to retain the roof pitch and original features, such as dormers, turrets, balustrades, bargeboards, quarter round, cornices, brackets, weather vanes, or lightning rods when feasible.
- d. Features including but not limited to: dormers, crickets, or balustrades may be added if they are appropriate for the style of the building.
- e. When repairing of historic material is necessary it needs to blend with existing material in size, shape, color, pattern, and texture. Use like kind material where possible and historically appropriate substitute material if the historic material is not technically feasible.
- f. When replacing specialty roofing materials, such as "mission tiles," stamped tin, asbestos shingles, or patterned slate with composition shingles is strongly discouraged as the roof is an important defining feature of the structure.
- g. Exposed tarpaper rolls or SBS modified asphalt roofing should not be used as roofing material.
- h. Roof ventilators, skylights, solar panels, and other roof mechanical items shall be installed on rear slopes or other locations not easily visible from the principal elevation when technically feasible.
- i. Application of roof coatings to historic roofing material is discouraged and should be avoided. When necessary to use protective coatings to preserve original materials, they should blend with existing material in composition, size, shape, color, pattern, and texture.
- j. Built in gutters that are important to the architecture of the structure should be repaired and retained when technically feasible.

- k. It is appropriate to install gutters and downspouts in such a manner as to minimize concealment of historic architectural elements.

6. Architectural Metals

Architectural metals found on historic structures may include cast and wrought iron, pressed tin, copper and aluminum.

Guidelines

- a. It is appropriate to preserve, protect and retain architectural metal features (including natural patinas) that are character-defining elements of a historic building or site, including fences, gates, cornices, rails, roofs, gutters, downspouts, and hardware. If replacement is necessary, use metal that is similar to the original. Consider substitute material if the original material is not technically feasible.
- b. It is appropriate to paint previously painted metals in colors appropriate to the colors of the historic building or site and the historic district.

7. Siding and Trim

Wood clapboard siding is a common siding material found in historic districts. Other wood siding types include drop siding, flush siding, and board-and-batten. Wood shingles are also found on houses in historic districts.

Guidelines

- a. It is appropriate to preserve, protect and retain the shape, form, height, materials, and details of historic structure walls, architectural features that define the character of exterior walls including but not limited to: bays, cornices, storefronts, arches, quoins, corner boards, and brackets and wall materials when technically feasible. Replacement materials should be like kind when possible or an appropriate material that blends with the existing material in composition, size, shape, color, pattern, and texture.
- b. It is not appropriate to introduce exterior wall features that diminish the original design or damage the exterior wall materials, or create a false historic impression.
- c. It is not appropriate to use techniques such as sandblasting and other abrasive treatments that can damage exterior walls.
- d. It is appropriate to locate vents and mechanical connections through historic foundations or walls on non-character-defining elevations, or inconspicuously on side or rear walls where they will not be visible from the street when technically feasible.
- e. When additional insulation is installed using external methods, it shall be installed in such a manner that original materials will maintain their appearance.

- f. The original siding should not be replaced or covered by artificial siding such as aluminum, vinyl, asphalt, asbestos, Masonite, or pressboard that would not have been used on the original structure.
- g. It is appropriate to preserve, protect and retain original wooden trim, wooden features (siding, shingles, brackets, cornices, balustrades, columns, pediments etc) and details as well as their paints, colors, and finishes.

8. Windows and Doors

Fenestration is one of the most character defining features of an historic structure. The fenestration pattern of a building is the arrangement of doors and windows. The sizes of panes in a window reflect the style and sometimes the age of a building.


Early American homes featured small panes of glass, usually in a twelve-over-twelve pattern. However, by the late nineteenth century, glass manufacturers were able to produce large sheets of glass so that many older homes in historic districts display windows of one-over-one or two-over-two patterns. Most Victorian buildings have windows that were tall and narrow. A "picture window" with a border of small square panes of colored glass is the trademark of the Queen Anne style. Colonial Revival windows have multiple pane divisions, often with six-over-six or six-over-one patterns.

The Palladian window is a typical Colonial Revival element. It is a three-part window, with an arched-headed window flanked by two shorter square-headed windows.


Bungalows and American Four-squares often have long narrow panes in the upper sash and a solid pane in the lower sash. Beveled or etched glass is often found in historic district homes. The window features and the decorative glass are an important part of the overall design scheme. Improper or insensitive treatment of the fenestration pattern of a historic district house can seriously detract from its character to the point that the house loses its original stylistic identity.

Originally shutters served practical purposes. Their historic functional purpose has largely been replaced with an ornamental purpose. Modern shutters often do not match the dimensions of the window and are often constructed of artificial materials such as vinyl or aluminum.


Late Victorian/Queen Anne

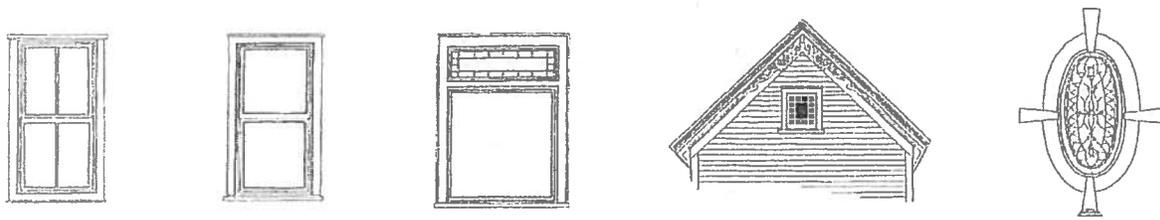

Early 20th Century/Colonial Revival

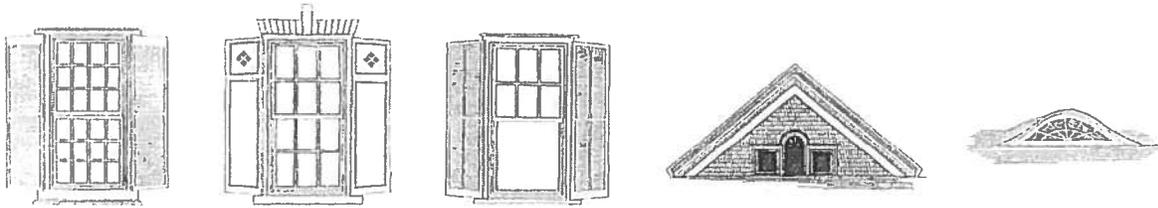

Bungalow/American Foursquare


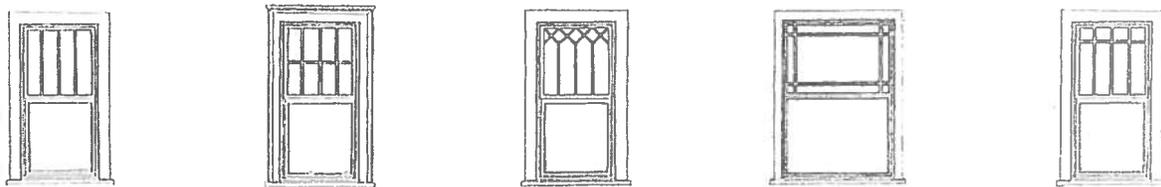


Guidelines

- a. It is appropriate to preserve, protect and retain original window and door elements such as sash, glass, sills, frames, casings, hardware, weather stripping, lintels, architraves and shutters.
- b. When the repair of a window or door is not technically feasible, the replacement design should match as closely as possible with the original window or door in material, scale, character, design, and appearance. New windows or doors should have matching sash, glass, sills, frames, casings, and muntin patterns. New sash should be made of wood, not metal unless metal is historically appropriate to the structure. Existing window casings and trim should be retained.
- c. The pattern, arrangements, and dimensions of doors and windows on the principal elevation or other character defining elevations should be retained, unless restoring the appearance of the structure to its original design. Window and door openings should not be enlarged or reduced to fit stock windows or doors.

- d. Windows or doors with snap-in muntins should be avoided.
- e. Existing vinyl windows should be replaced per historic guidelines.
- f. Front doors in the historic district should be appropriate for the style of the house. Flat surfaced doors and those with contemporary decorative windows should be avoided. A solid wood door is not a suitable replacement for an original door constructed of wood panels and glass.
- g. Doors with snap-in grids, and sliding glass doors, are not appropriate.
- h. Reflective or tinted glass is not appropriate where visible from the principal elevation. Clear solar films are permitted.
- i. It is appropriate to retain and repair existing historic shutters and their hardware.
- j. If a historic shutter must be replaced, the new shutter should compliment the original shutter in size, shape, number of panels, and style. New shutters that are not part of the original design must be carefully reviewed to determine historic appropriateness and correct design relative to the structure and neighborhood.
- k. Shutters should be attached to the window casing and not the siding or wall. Shutters should cover the entire window when closed. Even if the shutters do not close, they should appear to. Ornamental shutters may be appropriate if they can be historically attributed to the structure.

Appropriate.
Shutters fit window opening and are attached to window casing

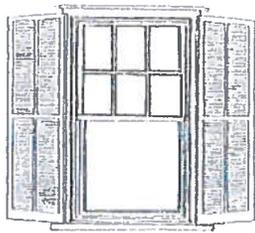

Inappropriate.
Shutters do not fit window opening and are attached to siding.

- l. Window greenhouses which are visible from principal elevations are inappropriate to historic properties.
- m. In a new addition to a building, every effort must be made to use windows and doors that compliment the originals in size, shape, placement, pattern, materials, and details.

9. Storm Windows and Doors

Storm windows and doors are considered necessary modern additions to historic district buildings. Storm windows with wooden surrounds painted to match or complement the colors of the house are encouraged and should be installed on the exterior of the window. Some property owners prefer to install storm windows on the interior of the window frame.

Guidelines

- a. Storm windows and doors should blend with the building rather than appear to be tacked on. The shape and general appearance should compliment the existing window or door.
- b. Raw metal storm window and door frames are not appropriate. The frames should be painted wood or painted or baked enamel finish aluminum.

10. Awnings

Movable canvas awnings have been used for years to provide shade and help control temperatures during the summer months. They can be raised in the winter when radiant heat from the sun will give free supplementary warming. Fabric awnings can still provide the same benefits today while adding color and interest to the house.

Awnings are most appropriate for late and post-Victorian house styles, especially Queen Anne, Colonial Revival, Bungalow, and the many Period Revival styles.

Guidelines

- a. Awnings should be wood, metal, canvas or synthetic fabric.
- b. Awnings on windows, entryways and porches should be appropriate in design, proportion, scale and color to the architectural style and period of the structure. Installation methods should preserve historic materials.


11. Porches, Patios and Steps

A distinguishing feature of most houses in historic districts is the front porch. Originally, the front porch kept the entrance dry and provided a place to escape the summer heat. Furnished, the porch was an outdoor leisure area. Other accessories included canvas awnings, blinds made of canvas, wood or reeding, straw or hemp rugs, plant stands, and flower boxes. Entrances and steps serve as an important first view to the property and require significant effort to preserve them as they were originally intended.

Porches were embellished with details, which reinforced the architectural style of the house. Machine carved posts, brackets, railings, spindle work, and sawn work make up the "gingerbread" found on Queen Anne style houses. Classical columns and trim work are often found on Neo-Classical and Colonial Revival style houses. The floor of the porch was often originally built with a slight pitch to shed water.

Guidelines

- a. It is appropriate that, if built as part of the original structure, a porch and all of its features (steps, handrails, balustrades, columns, brackets, spandrels, and roofs) should remain in their original state. Porches and steps should not be stripped of any original material or architectural features.
- b. New materials used to repair porches should be like-kind and compliment the design and original materials in size, shape, placement, pattern, and details.
- c. Porch restorations that involve the placement of missing details such as steps, brackets, or balustrades should be based on historical documentation. Adding details to porches to create a false historic appearance is not appropriate.

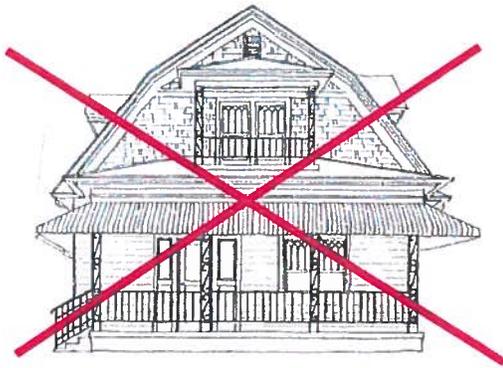

House with original porch details replaced with metal substitutes is **INAPPROPRIATE**.




Same house with **APPROPRIATE** columns and railings and with metal awning removed.

- d. When introducing features to assist people with disabilities, it is appropriate to preserve the original design of the porch or the entrance so as not to diminish historic materials or features when possible.
- e. It is not appropriate to enclose front porches.
- f. Side porches may be enclosed to create sun porches if the design of the enclosure is compatible with the architecture of the structure.
- g. It is appropriate when constructing new porches, entrances and balconies to use historic roof forms, materials, and details compatible with the main building.



APPROPRIATE

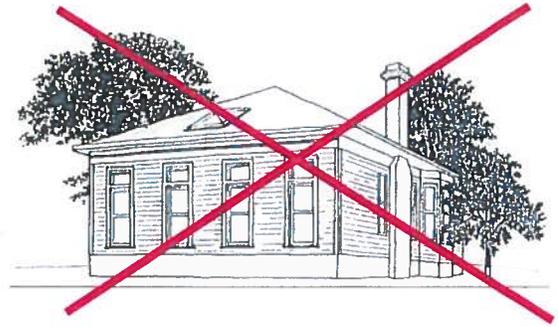


**Front porch closed in for interior space.
INAPPROPRIATE**

- h. Original porch steps should be retained as closely as possible if repair or replacement is needed.



INAPPROPRIATE
Side porch closed in with solid walls.

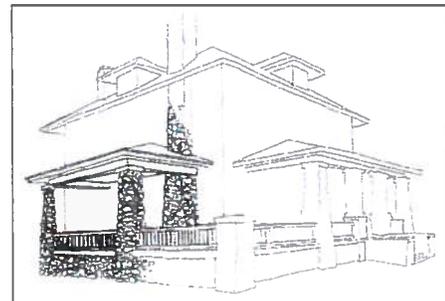


APPROPRIATE

- i. It is not appropriate to use artificial turf, indoor/outdoor carpeting, or similar materials installed as covering for porch or patio floors.

PORCH RAILINGS

Following are some of the porch railings appropriate to the RMP Historic District.

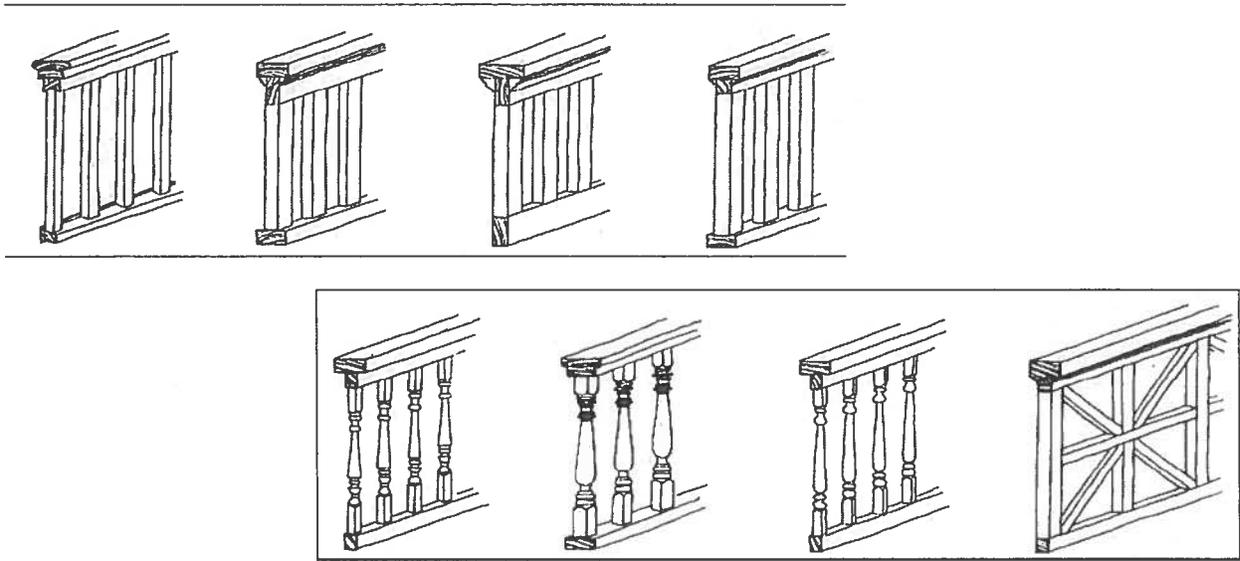

12. Exterior Colors

Color was an element of the original design intent of an architect or builder. However, since early photographs were black and white, only tones and contrasts can often be determined. Color chronology tests can determine the original colors. This test involves the examination of paint scrapings under a microscope. Professional preservationists at the State Historic Preservation Office can assist in this process.

Guidelines


- a. Original painted materials shall be protected with a sound paint film and caulking. Color, and its placement, should be historically appropriate to the period and architectural style of the structure. When in doubt, base the choice of color on historical accuracy for the building and the district.
- b. Wooden fences may be painted. When painted, the color shall be compatible with the exterior of the building and in character with the period of the home.
- c. Materials such as brick, stone, wood shingles, and certain metals, which have historically been unpainted, should not be painted.

13. Reserved

14. Mechanical Systems, Utilities and retrofits

Guidelines

- a. It is appropriate that mechanical services, utilities, and retrofits be installed in areas and spaces that will require the least possible alteration to the plan, materials, and appearance of the building when technically feasible. It is appropriate to screen exposed ductwork or piping, fuel tanks, plumbing vents, solar collectors, and satellite dishes. They should not be visible from the principal elevation.
- b. Mechanical and energy retrofits should minimize damage to historic materials and should be installed in a manner that minimizes the visual impact to the structure.
- c. Fire escapes and features designed to assist people with disabilities should be designed so that there is minimal visual impact on the historic structure, and that they can be built or removed without damaging historic materials.
- d. Exterior stairs should be located on the rear or side of the structure.

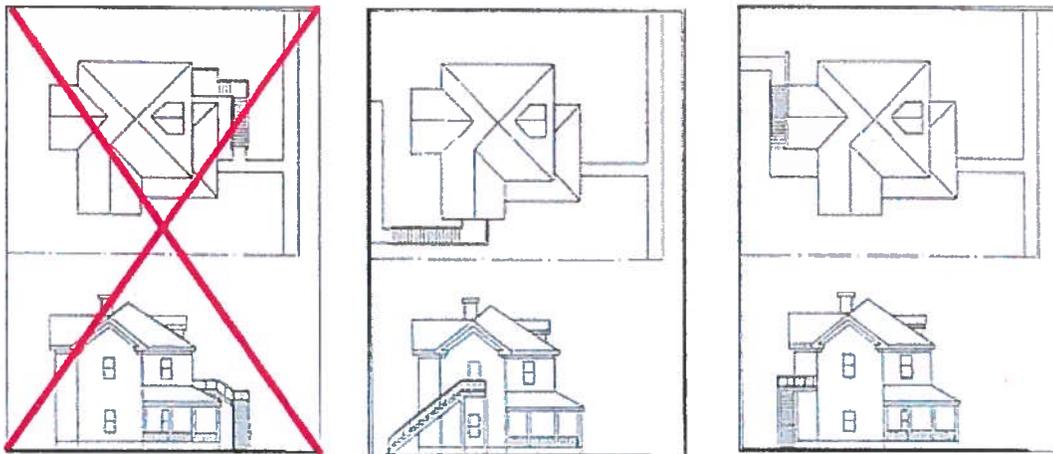

Inappropriate

Appropriate

Most Appropriate

V. NEW CONSTRUCTION

A. Introduction

The objective of the new construction guidelines is not to prevent change, but to ensure that future construction projects respect the general character of the historic district neighborhoods.

Applicants for Certificates of Appropriateness for new construction and their architects are strongly urged to meet with the Historic Preservation Staff to discuss their plans and ensure they are not incongruous with the special character of the historic district.

Building site refers to the placement of the structure on the lot. Setback and massing should establish a framework of order and coherence. The use of continuous setback patterns ensures a strong and consistent streetscape. Setbacks in historic districts vary, but generally the houses are relatively close to the street.

Guidelines


- a. It is appropriate for new construction to be landscaped following the existing guidelines for landscaping (page 30).
- b. Principal elevations should have turf installed or grass planted. It is inappropriate to leave principle elevations at new construction sites as unimproved dirt lots. Corner lots should have street-side side elevations similarly improved.
- c. Minimize any grading or site disturbance during construction and limit the use of heavy construction equipment to prevent damage to significant site features and unknown (buried) archaeological resources.
- d. Protect significant site features, including mature trees and known archaeological resources, from damage during or as a result of construction.

1. Primary Structures

Guidelines

- a. Site new primary buildings so they are consistent in terms of setback and orientation from the street and spacing between existing buildings with surrounding buildings which contribute to the historic character of the streetscape.

New buildings should be set back similarly to their neighbors.

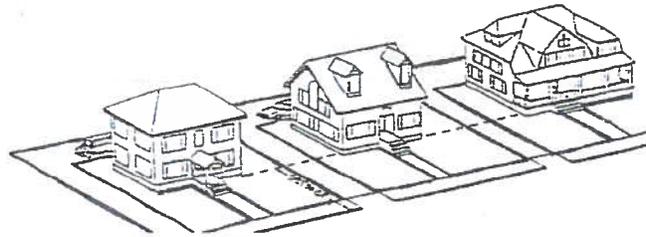

Appropriate

- b. Design the primary building so that the overall character of the adjacent streetscape and the building site, including its topography and any significant site features, are maintained.




APPROPRIATE




INAPPROPRIATE

Major reshaping of land contours is not recommended.

- c. Design new primary buildings to be compatible in height, roof form, scale, massing, material, detail and proportion of the street façade with surrounding buildings that contribute to the historic character of the district.

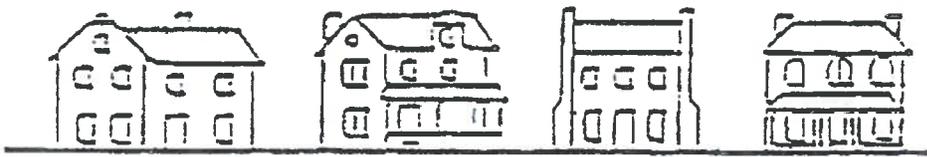


APPROPRIATE

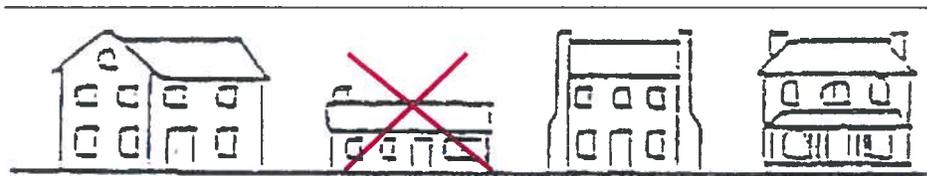


INAPPROPRIATE

INAPPROPRIATE ROOF STYLING

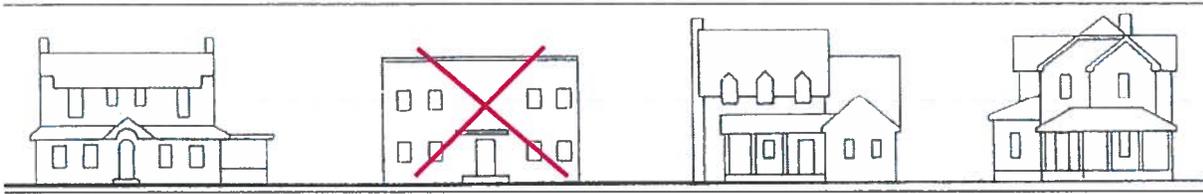


Roof type and pitch for new construction should conform to that of existing buildings.

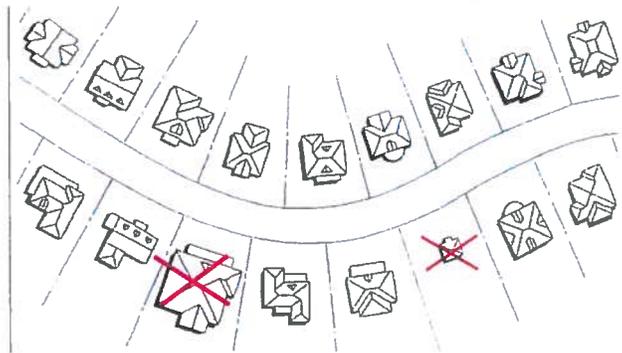

INAPPROPRIATE MASSING

- d. Locate and size door and window openings in new primary buildings so they are compatible in placement, orientation, spacing, proportion, size and scale with those of surrounding buildings that contribute to the historic character of the district.
- e. Select doors and windows for new primary buildings that are compatible in material, proportion, subdivision, pattern, detail and finish with those of surrounding buildings that contribute to the historic character of the district.
- f. Select materials and finishes for new primary buildings that are compatible in composition, texture, scale, pattern, detail, finish and color with those of the surrounding buildings that contribute to the historic character of the district.
- g. Design new primary buildings to be compatible with but differentiated from historic buildings in the district. Unless the building is an accurate reconstruction, it is not appropriate to create a false sense of historical development through the duplication of historic features or details from an earlier era on a new primary building.

INAPPROPRIATE

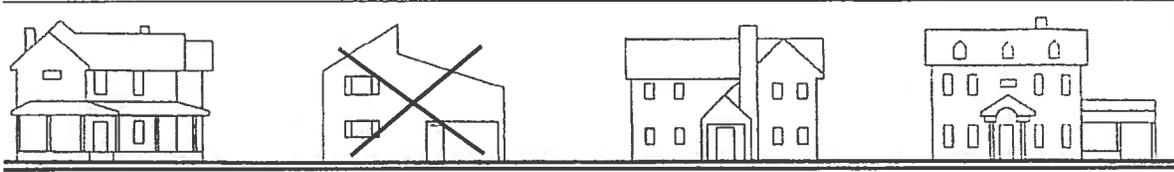

New construction should be compatible in basic shape and form with existing buildings.

2. Secondary or Accessory Structures

Guidelines

- a. Site and orient new outbuildings or garages in locations that are compatible with the traditional relationship of outbuildings or garages to district houses of similar architectural style and sites of similar size.
- b. Design new outbuildings and garages to be compatible in roof form, scale, massing, material and detail with the historic character of the primary building on the site and with other historic outbuildings or garages in the district. Maintain the traditional height and proportion of historic outbuildings and garages in the historic district.
- c. Select doors and windows for new outbuilding and garages that are compatible in placement, material, proportion, subdivision, pattern and detail with doors and windows of the primary building on the site and with other outbuildings and garages that contributes to the historic character of the district.
- d. Select materials and finishes for new outbuildings and garages that are compatible in composition, texture, scale, pattern, detail, finish and color with the primary building on the site and with other outbuildings or garages in the district.
- e. It is not appropriate to site a new outbuilding or garage in a location that will require the removal of a significant original site feature or building element.
- f. It is not appropriate to design new outbuildings and garages that visually overpower the primary structure due to the size, height or siting.
- g. Prefabricated wood storage buildings should blend with original structures and similar historic structures in the district in size, material and design and scale. Scale and size should be given special consideration. Metal and plastic utility sheds, metal carports and metal garages are not allowed.

3. Additions to Existing Structures

Guidelines

- a. Retain and preserve earlier additions that contribute to the overall historic character and form of a district building.
- b. Locate new additions cautiously, so they do not compromise the architectural integrity of the historic building.
- c. Minimize the size, scale and height of new additions so they do not visually overpower the historic building or substantially alter the site's proportion of constructed area to un-built area.
- d. Design the addition so that the overall character of the historic building and the building site, including its topography and any significant site features, are preserved.
- e. Design new additions to be compatible in height, roof form, scale, massing, surface materials, detail and proportion with the historic building.
- f. Locate and size door and window openings in new additions so they are compatible in placement, orientation, spacing, proportion, size and scale with those of the historic building.
- g. Select doors and windows for new additions that are compatible in material, proportion, subdivision, pattern, detail and finish with those of the historic building.
- h. Select materials and finishes for new additions that are compatible in composition, texture, scale, pattern, detail, finish and color with those of the historic building.
- i. Minimize the damage to the historic building by constructing additions to be self-supporting, if possible. Attach additions to the historic building with care so that any loss of historic fabric is minimized.

4. Decks

Guidelines

- a. If possible, introduce decks inconspicuously in areas that are not visible from the street, usually on the rear elevation, inset from either rear corner. Locate the deck with care so that it does not damage or conceal significant historic features or details of the historic structure.
- b. Minimize the visual impact of the deck by limiting its size and scale. It is not appropriate to introduce a deck if it will visually overpower the building or site or substantially alter the site's proportion of constructed area to un-built area.

- c. Minimize the damage to the historic building by constructing decks to be self-supporting. Attach them to the historic building with care so that loss of historic fabric is minimized.
- d. Align decks typically with the height of the building's first floor and screen the deck's structural framing with foundation plantings, lattice or other compatible screening materials.
- e. Paint or stain decks in colors that are complimentary to the Historic District.
- f. It is not appropriate to introduce a deck if it will require the loss of a character-defining building or site feature.

B. Moving Buildings

The moving of a historic building should be considered a "last resort" alternative to the demolition of a structure. Moving a structure usually destroys the original context of the building and may result in the substantial loss of original building material.

Sometimes the moving of a building becomes necessary as part of a revitalization plan. If a significant building is surrounded by an incompatible environment, it can sometimes be relocated to a more enhancing environment.

Since building moving is a complicated and time-consuming process, it should not be undertaken until every aspect of the project has been considered and evaluated. Environmental, architectural, and moving questions as well as zoning and building code requirements, parking regulations, handicapped access, and fire restrictions must be studied.

If moving a structure is warranted, every effort should be made to move the building intact as a single unit. Every effort should be made to protect the integrity of the building during the move, especially if partial disassembly is required. The City Building Inspector should be consulted before any move is undertaken.

Guidelines

- a. Documentation of the original site conditions is required before moving the structure. Use photographs and other written or graphic items such as site plans to record the original setting.
- b. Protect significant site features at the original site, along the route of the move, and at the new site from damage during or after the move.
- c. A proposed relocation within a historic district should not have a detrimental effect on the historical aspects of other properties in the historic district. It is not recommended

that structures located in historic districts be moved outside the boundaries of the said district.

- d. The proposed relocation site should not possess historical significance that would be adversely affected by the intrusion of the structure.
- e. It is appropriate to select of a route that will minimize the impact on significant natural vegetation, such as mature trees.
- f. The site for a relocated building should be suitable in terms of building spacing, setback, orientation, height, scale, and massing.
- g. The relocated building should be compatible with the style and period of other buildings along the street.
- h. The site of the relocated building should be landscaped in a manner that is consistent with the character of the historic district.
- i. Care should be taken to protect the historic building during and after the move.
- j. The guidelines for new construction should be followed when buildings are relocated.

C. Demolition

Demolition of significant structures within the historic districts or of designated historic properties is strongly discouraged. Once a historic structure is demolished, it can never be recreated. The structure is lost once demolished, as well as the context in which it existed.

While the Historic Preservation Commission cannot deny a Certificate of Appropriateness for demolition, the Commission can delay the demolition of a structure for up to a period of 365 days. During this period, alternate methods for preserving the structure will be explored. Historic properties with statewide significance can be denied demolition unless it would be a financial burden to the property owner.

The Commission will consider if the building can be moved, if it contributes to the historic character of the neighborhood, if there are potential owners willing to restore the building, if the building can be adapted to serve its owners' needs, or if the building is structurally feasible for reuse.

The Commission will make it widely known that a significant building is threatened with demolition and that alternatives are being sought.

All buildings in a local historic district are considered to be contributing, although it may have less historical integrity than other in the historical district. Therefore, in the case of intrusive structures or those with little architectural value, the Commission may waive all or

part of the delay period. In making this determination, the Commission will carefully weigh the value of the structure to the neighborhood setting.


Guidelines

- a. Work with the Historic Preservation Commission and other interested parties to seek viable alternatives to demolition.
- b. Prior to demolition, extensively record the historic building in its original setting and document the existing site and building conditions through photographs, drawings/plans and any other historical documentation.
- c. Prior to demolition the Historic Preservation Commission or Staff may seek consent to salvage, or allow others to salvage, architectural materials and features that could be reused.
- d. When requesting a COA for demolition, submit a site plan illustrating the proposed post-demolition site treatment.
- e. Protect significant site features, including mature trees and known archeological resources from damage as a result of the demolition.

VI. Appendices

A. Landscape and Building Terminology

The Rosemount-McIver Park district's structures follow a fairly conventional lot and orientation layout with front facades typically facing the street address and being generally aligned parallel to their street address roadway. Therefore, complex elevation/façade definitions and classifications are unnecessary for this district. However, some additional definitions can be of assistance when referring to properties under discussion.

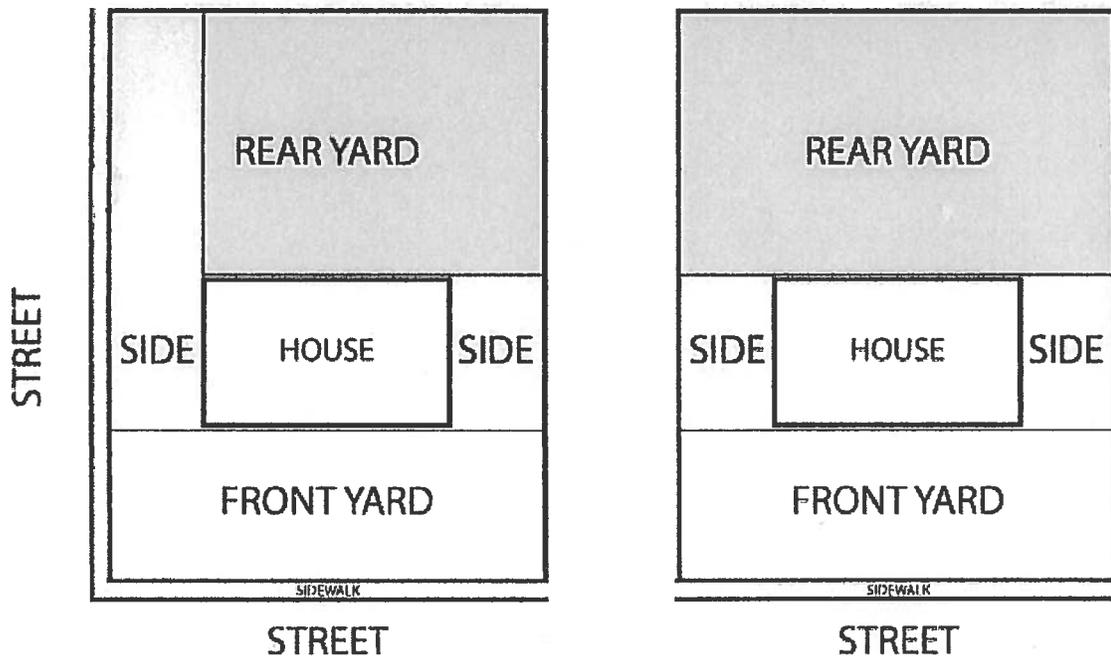

Corner Lot Image

Standard Lot Image

- **(Principal Elevation)** is the elevation/façade of the structure that is usually a/or the "Character Defining Elevation" of the structure. The "Principal Elevation" normally, but not always, contains the formal front door, faces the street address and is often considered the "front" of the structure. The "Principal Elevation" often, but not necessarily exclusively, has a higher standard applied for compliance with historic preservation guidelines. There can be only one "Principal Elevation."
- **(Character Defining Elevation)** is an elevation/façade of the structure that exhibits unique or special architectural qualities, features or characteristics that distinguish the structure and identify it with a particular style and period. A "Character Defining Elevation" often, but not necessarily exclusively, has a higher standard applied for compliance with historic preservation guidelines. A structure normally has one "Character Defining Elevation" but it is possible that some structures may have more than one. Examples can often include structures on corner lots that have "Character Defining Elevations" facing both streetscapes. It is

possible for a structure to exhibit "Character Defining Elevations" on one, two or in some exceptional cases all sides.

- **(Yard, Front)** A yard extending across the front width of a lot and being the minimum horizontal distance between the street line and the principal building or any projection thereof, other than steps, unenclosed balconies and unenclosed porches. The front yard of a corner lot is the yard adjacent to the designated front lot line. (see illustrations above)
- **(Yard, Side Corner Lot)** The property area which extends from the front of the structure to the rear of the lot parallel with the side of the structure. (see illustrations above)
- **(Yard, Rear)** A yard extending between the side yards of a lot or between the side lot lines in the absence of side yards, and being the minimum horizontal distance between the rear lot lines and the rear of the principal building or any projection thereof, other than steps, unenclosed balconies or unenclosed porches. On corner lots the rear yard is in all cases at the opposite end of the lot from the front yard. (see illustrations above).
- **(Yard, Side)** A yard extending from the front yard to the rear yard between the side lot line and the nearest line or point of the building. This side yard definition may apply for three side of a flag lot if the flag pole portion of the lot exceeds the front yard setback. Where a lot has sufficient land area, the side yard may exceed the minimum side setback as specified in 4.7 of the Unified Development Ordinance. An interior side yard is defined as the side yard adjacent to a common lot line. (see illustrations above)

B. Glossary

Alligatored - Cracked or having acquired the appearance of alligator hide, as from weathering or improper application to a surface.

Appurtenant Features - Those structures which define or surround the site of a building.

Architrave - The molded frame surrounding a door or window.

Balustrade - A series of short pillars or turned uprights with a rail.

Bargeboard - A wooden member, usually decorative, suspended from and following the slope of a gable roof.

Board-and-Batten - Vertical exterior siding with the joints between the siding (boards) covered with narrow strips (battens). The battens are used to conceal the gaps between the siding boards.

Bracket - Projecting support member found under eaves or other overhangs; may be plain or decorated.

Building Site - The placement of the structure on the lot.

Bungalow (1890 - 1940) - An architectural style characterized by small size, overall simplicity, broad gables, dormer windows, porches with large square piers, and exposed structural members.

Casement Window - A window sash that opens on hinges fixed to its edge.

Casing - The finished visible framework around a door or window.

Chimney Pot - A terra cotta, brick, or metal pipe that is placed on the top of a chimney as a means of increasing the draft, often decoratively treated.

Chimney Stack - A number of flues embodied in one structure rising above a roof.

Colonial Revival (1870 - 1950) - An architectural style characterized by a balanced facade; use of decorative door crowns and pediments, sidelights, fanlights, and porticos to emphasize the front entrance; double hung windows with multiple panes in one or both sashes; and frequent use of string courses on decorative cornices.

Corbelling - A series of projections, each stepped out further than the one below it; most often found on walls and chimney stacks.

Cornice - The exterior trim of a structure at the meeting of the roof and wall usually consisting of bed molding, soffit, fascia, and crown molding.

Crown Molding - The crowning and finished molding, most often located in the area of transition between wall and ceiling, or on the extreme top edge of an exterior wall.

Dentil - A row of small blocks at the base of a classical cornice, resembling a row of evenly spaced teeth.

Design - Design is the combination of elements that create the form, plan, space, structure, and style of a property. Design includes such elements as organization of space, proportion, scale, technology, ornamentation, and materials. Design can also apply to districts. In most cases, unwise alterations to the original building design will harm the aesthetic or structural integrity of the structure.

Dormer - A vertical window projecting from the slope of a roof; usually provided with its own roof.

Double Hung Window - A type of window with an upper and lower sash in vertical grooves, one in front of the other which is moveable by means of sash cords and weights.

Eave - The part of a sloping roof that projects beyond a wall.

Elevation - The external faces of a building; also a drawing to show any one face of a building.

Embossed - Carved or raised in relief.

Facade - The "face" of a building, normally the front, but sometimes referring to any side if qualified such as "rear façade."

Fascia - A flat board used to cover the ends of roof rafters.

Fenestration - The arrangement of windows and other exterior openings on a building.

Flashing - Pieces of non-corrosive metal installed at junctions between roofs and walls, around chimneys, and around other protrusions through the roof.

Flush Siding - Wooden siding which lies on a single plane. This was commonly applied horizontally except when it was applied vertically to accent an architectural feature.

Footprint - is the outline of a building on the land.

Frieze - The middle division of an entablature, between the architrave and cornice; usually decorated but may be plain.

Gable - The triangular end of an exterior wall in a building with a ridged roof.

Gable Roof - A sloping (ridged) roof that terminates at one or both ends in a gable.

Gambrel Roof - A roof having a double slope on two sides of a building.

Gazebo - A small summer house or other space with a view; usually found in a garden or yard, but may also be incorporated into the facade of a building, or found on the roof of a house.

Gingerbread - Thin, curvilinear ornament.

Height - Height consistency is an important factor - which contributes to the character of an area. Most blockfaces in the historic districts contain a mixture of one and two story structures. Almost all houses are built on raised foundations, which contribute to the height of the building. Many ceiling heights exceed nine feet.

Joinery - The craft of connecting members together through the use of various types of joints; used extensively in trim work and in cabinet work.

Large trees - at least 30 feet in height at maturity.

Lintel - A horizontal beam bridging an opening.

Lot Coverage - Lot coverage is a measure of the density of developed land along each block front and for each lot relative to the footprint of structures.

Major Work -Projects that involve a change in the appearance or historic fabric of a property and are more substantial in nature than Minor Work. Major Work REQUIRES a public hearing before the Historic Preservation commission.

Masonry - Work constructed by a mason using stone, brick, concrete blocks, tile, or similar materials.

Materials - Materials are the physical elements that were combined or deposited during a particular pattern or configuration to form a historic property. A property whose historic features and materials have been lost is usually not eligible for National Register nomination.

For these reasons, to retain integrity, a property must retain the key exterior materials dating from the period of its historic significance.

Meeting Rail - (in a double-hung window) the rail of each sash that meets a rail of the other when the window is closed.

Minor Work - Primarily consist of changes to existing elements or the introduction of new elements that are relatively small in scale and overall impact to the structure, yet change its appearance. Minor Works are required to be reviewed by Historic Preservation Staff. A public hearing is not required for these projects.

Mission Tiles - A half barrel shaped red roofing material made of fired clay.

Molding - A continuous decorative band; serves as an ornamental device on both the interior and exterior of a building or structure; also often serves the function of obscuring the joint formed when two surfaces meet.

Mullins - A vertical member between the casements or panes of a window or the panels of a screen.

Muntin - A thin strip of wood or steel used for holding panes of glass within a window sash.

Orientation - Orientation refers to the angle or alignment of the main facade with the street. Throughout the historic districts, the main facades are parallel to the street.

Palladian Window - A window with three openings with the large arched central light flanked by rectangular sidelights.

Parging - The technique of applying a cement-like coating to masonry.

Pediment - A triangular section framed by horizontal molding on its base and two sloping moldings on each of its sides; used as a crowning element for doors, windows, and niches.

Pier - Vertical supporting member that is part of the foundation.

Pitch - The degree of slope on a roof, usually noted as a fraction/ratio.

Portico - A covered walk or porch supported by columns or pillars.

Portland Cement - A hydraulic cement binder for concrete; made by burning a mixture of clay and limestone.

Prairie Style (1900 - 1920) - An architectural style characterized by its overall horizontal appearance which is accomplished through the use of bands of casement windows, long terraces or balconies, flanking wings, low-pitched roofs with wide overhangs, and darkly colored strips or bands on exterior walls.

Preservation - Defined as the act or process of applying measures necessary to sustain the existing form, integrity, and materials of a historic property. Work, including preliminary measures to protect and stabilize the property, generally focuses upon the ongoing maintenance and repair of historic materials and features rather than extensive replacement and new construction. New exterior additions are not within the scope of this treatment; however, the limited and sensitive upgrading of mechanical, electrical, and plumbing systems and other code-required work to make properties functional is appropriate within a preservation project.

Quarter Round - A small molding that has the cross section of a quarter circle.

Queen Anne (1800 - 1910) - An architectural style characterized by irregularity of plan and massing, variety of color and texture, variety of window treatment, multiple steep roofs, porches with decorative gables, frequent use of bay windows, chimneys with corbelling, and wall surfaces that vary in texture and material used.

Railing - 1) A fence-like barrier composed of one or more horizontal rails supported by widely spaced uprights; balustrade. 2) Banister. 3) Rails collectively.

Reconstruction - The act of reproducing by new construction the exact form and detail of a vanished building, structure, or object, as it appeared at a specific period of time.

Rehabilitation - The act or process of returning a property to a state of utility through repair or alteration which makes possible an efficient contemporary use while preserving those portions or features of the property which are significant to its historical, architectural, and cultural values.

Renovation - The restoration to a former better state by cleaning, repairing, or rebuilding.

Repointing - Removing old mortar and replacing it with new mortar.

Restoration - The act or process of accurately recovering the form and details of a property and its settings as it appeared at a particular period of time by means of the removal of later work or by the replacement of missing earlier work.

Ridge - The horizontal line formed when two roof surfaces meet.

Right-of-Way - The Right-of-Way is a strip of land dedicated for public streets, sidewalk and utilities. This normally includes the entire street, curb, planting-strip and up to or including the sidewalk. The City of Sanford and Lee County UDO defines different Right-of-Way dimensions based upon the type of street.

Routine Maintenance- or strict repairs that do not change design or materials, such as replacing broken window panes with like-kind materials or pruning shrubbery.

Sandblast - An abrasive method of cleaning bricks, masonry, or wood that involves directing high-powered jets of sand against a surface.

Sash - The framework into which panes are set.

Sawnwork - Ornamentation in cut-out planking, formed with a bandsaw, popular in the 1880's and 1890's. This decorative detailing is flat.

Scale - Scale is the size of the construction units and their architectural details in relation to the size of man. Scale is also determined by the relationship of a building mass to open space.

Setback - The distance from the street (in the case of front setback) or property line to the nearest part of the applicable building, structure, measured perpendicular to the street or property line, in front of which no structure may be erected (as per the Unified Development Ordinance, page 45).

Setting - Setting or context is the physical environment of a historic property. Setting refers to the specific place in which the property played its historic role. The physical features that constitute the setting of historic property can be either natural or manmade.

Sill - The horizontal water-shedding member at the bottom of a door or window.

Sillplate - The horizontal member that rests on the foundation and forms the lowest part of the frame of a structure.

Small trees - 10-30 feet in height at maturity.

Soffit - The exposed underside of an arch, cornice, balcony, beam, etc.

Spacing - The distance between adjacent buildings.

Spandrel - The sometimes ornamental space between the right or left exterior curve of an arch and an enclosing right angle.

Streetscape - A view or picture of the street setting depicting the proposed or existing building in relationship to other buildings on the street; this may also include landscaping and natural features.

Stucco - An exterior wall covering consisting of a mixture of Portland cement, sand, lime, and water.

Surround - The frame around a door or window, sometimes molded.

Terra Cotta - A fine-grained fired clay product used ornamentally on the exterior of buildings; may be glazed or unglazed, molded or carved; usually brownish red in color, but may also be found in tints of gray, white, and bronze.

Topography - Topography is the natural rise and fall or slope of the existing grade that exists in the historic districts. Typically they have varied and are attractive topographical features such as rolling hills and mature vegetation with a natural informal landscaping. Brick and stone retaining walls are common while the uses of more modern landscaping materials are not in keeping with traditional landscape designs.

Topping - Removal of top and upright tree branches resulting in abnormal tree growth, often results in a "table top" effect.

Transom - A small window or series of panes above a door, or above a casement or double-hung windows.

Turret - A small and somewhat slender tower; often located at the corner of a building.

Valley Flashing - Copper, galvanized sheet metal, or aluminum strips placed along the depressed angle formed at the meeting point of two roof slopes.

Veneer - A decorative layer of brick, wood, or other material used to cover inferior structural material thereby giving an improved appearance at a low cost.

Veranda - Roofed open gallery attached to the exterior of a building.

Woodshakes - Hand-cut wood shingles. Shakes can be distinguished from shingles in that shakes are not tapered and usually have more irregular surfaces. Their length varies from 12 inches to over three feet.

Woodshingles - thin tapered pieces of wood primarily used to cover roofs and facades of buildings to protect them from the weather. Historically shingles were split from straight grained, knot free bolts of wood.

C. Plant Materials

Acceptable plant materials that may be used for landscaping in the Rosemount McIver Park Historic District, *however other plant species may be approved*. These plant materials are suitable for the climate of Sanford and are generally easy to locate within a reasonable distance from Sanford. This list was adopted from the Unified Development Ordinance for Broadway, Lee County and The City of Sanford.

Ground Covers

(Botanical Name / Common Name)

Auja reptans/Carpet Bugle
Cotoneaster/Bearberry
Hemerocallis/Daylily
Dianthus/Dianthus
Euonymus fortunei/'Coloratus' Wintercreeper
Euonymus
Hedera canariensis/Algerian Ivy
Hadra helix/English Ivy
Hypericum claycum/Aaronsbeard, or
St. Johnswort
Juniperus conferta/'Blue Pacific, 'Shore Juniper

Juniperus horizontalis/Creeping Juniper
Santolina chamaecyparissus/Lavender cotton
Liriope muscarii/Liriope
Liriope spicata/Spreading Liriope
Ophiopogon/Japonicus Dwarf Lilyturf or
Mondograss
Juniperus conferta/Pacific juniper
Phlox subulata/Moss Phlox or Thrift
Vinca minor/Common Periwinkle
Vinca major/Large Periwinkle

Ornamental Grasses

(Botanical Name / Common Name)

Arundo donax var. varicolor/Varigated
Giant Reed
Calamagrostis x acutiflora/'stricata
Feather Reed Grass
Carex morrowii/Japanese Sedge Grass
Chasmanthum latifolium/Northern Sea Oats
Cortaderia selloana/Pampas Grass
Elymus glaucus/Blue Wild Rye
Eragrostis curvula/Weeping lovegrass
Erainthus ravennae/Ravenna Grass
Miscanthus sinensis/Chinese Silver Grass
Miscanthus sinensis/'Gracillimus,
Maiden Grass

Miscanthus sinensis/'Strictus, Porcupine Grass
Miscanthus sinensis/'Varigatus',
Varigated Equalis
Miscanthes sinensis/'Zebrines, Zebra Grass
Pennistum alopecuroides/
Australian Fountain Grass
Pennisetum setaceum/Fountain Grass
Pennisetum setaceum/'Rubrum,'
Crimson Fountain Grass
Pennisetum villosum/Feathertop Grass
Phalaris arundinacea/'Picta', Ribbongrass

Small Shrubs (2 to 5 feet at maturity)

(Botanical Name / Common Name)

- Abelia x grandiflora/Abelia
Aucubajaponica Dwarf Aucuba
Azleas, Hybrids
Callicarpa Americana/Beautyberry
Berberis thunbergii/Japanese Barberry
Buxus microphylla var. japonica/Japanese boxwood
Contoneaster/Contoneaster
Deutzia gracilis/Slender deutzia
Fothergilla/Fothergilla
Gardenia radicans/Creeping Gardenia
Itea virginica/Virginai Sweetspire
Jaminum floridum/ Showy Jasmine
Jaminum floridum/Showy Jasmine
Chaenomeles japonica/Japanese flowering quince
Jasminum nudiflorum/Winter Jasmine
Juniperus davurica/'Exoansa' Parsons Juniper
Juniperus horizontalis/'Plumosa, Andorra Juniper
Kerria japonica/Japanese Kerria
Lonicera pileata/Privet Honeysuckle
Mahonia aquifolium /Oregon Grape Holly
Pinus mugo 'Compacta'/Dwarf Mugo Pine
Ilex crenata/Hoogendorn holly
Hydrangea arcorescens/'Annabelle'
Smooth Hydrangea
Hypericum/St. John's-Wort
Ilex cornuta/'Carissa' Carissa Holly
Ilex cornuta/'Rotunda' Dwarf Chinese Holly
Ilex crenata/'Compacta' Compact Holly
Ilex crenata/'Green Lustre'
Ilex crenata/'Helleri' (Heller) Japanese Holly
Ilex crenata/'Hetzi' Hetz Holly
Ilex vomitoria/'Nana'Dwarf Yaupon Holly
Nandina domestica/'Harbour Dwarf' or
'Gulf Stream'
Prunus laurocerasus/Otto laurel
Pittosporum tobira/'Nana', Dwarf Pittosporum
Potentilla/Cinquefoil, Five fingers, Potentilla
Pyracantha koidzumii/'Santa Cruz'
Raphiolepis indica/Indian Hawthorne
Spirea x burmelda/Bumald Spirea
Spirea/'Little Princess'
Spirea nipponica/'Snowmound'
Spirea thunbergii/Thunberg Spirea
Var./boxleaf wuonymus
Virburnum davidii/David Virburnum

Medium Shrubs (5 to 8 feet at maturity)

(Botanical Name / Common Name)

Rhodendron Prunifolium / Azalea, Plumleaf

Rhodendron Indica / Azalea, Southern Indica

Hybrids

Aronia arbutifolia

Azaleas

Aucubajaponica / Japanese Aucuba

Berberis julianae / Wintergren Barberry

Buddleja

Buxus sempervirens / Common Boxwood

Carlessiia buikwoodii viburnum

Chinese snowball

Cytissus scoparius / Scotch Broom

Dwarf crape myrtles

English laurel

Forsythia intermedia, hybrids Border Forsythia

Gardenia

Ilex Crenata / Hetzi Japanese Holly

Hydrangea macrophylla / Bigleaf Hydrangea

Hydrangea quercifolia / Oakleaf Hydrangea

Ilex cornuta / 'Burfordii Nana' Dwarf Buford Holly

Olex glabra / Inkberry Holly

Japanese Rose

Japanese yew

Judd vibrunam

Kalmis latifolia / Mountain Laurel

Lespedeza thunbergii / Thunberg Lespedeza

Mahonia bealei / Leatherleaf Mahonia

Mentor barberry

Nandina domestica / Nandina or

Heavenly Bamboo

North Bayberry

Oakleaf hydrangea

Persia lilac

Picrus

Roundleaf Japanese holly

Sandankusa viburnam

Schipka laurel

Several Rhododendron

Southern Indian Azalea

Spriea prunifolia / 'Plena' Bridalwreath Spriea

Spriea vanhutteii / Vanhoutte Spirea

Tea Olive

Yucca filamentosa / Adam's Needle Yucca

Zabel laurel

Large Shrubs (at least 8 feet at maturity)

(Botanical Name / Common Name)

- | | |
|---|---|
| Arbor vitae | Cherry elaeagnus |
| Autmun elaeagnus | Cleyera weigelia |
| Beatuybush | Cryptomeria japonica/largercultivars, e. g.
'Yoshion' Japanese Cryptomeria |
| Buddleia davidii/Butterfly Bush | Deutzia |
| Calycanthus floridus/Sweetshrub | Elaeagnus x ebbingii/Elaeagnus |
| Camellia japonica/Camellia | Elaeagnus pungens |
| Camellia sansanqua/Sansanqua Camellia | Euonymus alatus/Winged Euonymous |
| Chaenomeles speciosa/Flowering Quince | Myrica cerifoera/southern Waxmyrtle |
| Euonymus japonica | Osmanthus fortunei/Fortunes Osmanthus |
| Figtree | Osmanthus fragrans |
| Florida leucothoe | Pearlbush |
| Fringe Tree | Phailadelphis coronaries/Sweet Mockorange |
| Hamamllis vernalis/Vernal Witchazel | Pittosporum tobira/Japanese Pittosporum |
| Hibiiscus syriacus/Shurb Althea (Rose of Sharon) | Podocarpus macrophyllus var.
maki/SouthernYew |
| Holly wood juniper | Possumhaw |
| Ilex x attenuate/'Fosteri, 'Foster Holly | Pyracantha species/Firethorn |
| Ilex cornuta/'Burfordii', Burford Holly | Rhodendron austrinum/Florida Azalea (Red flower) |
| Ilex vomitoria/Yaupon Holly | Rhodendron calendulaceum/Flame Azalea
(Yellow-pink flower) |
| Ilex x meserveae Blue Princess Holly | Rhodendron canescens/Piedmont Azalea
(Rosey-purple flower) |
| Ilex aquifolium/English Holly | Rhus typhina/Staghorn Sumac |
| Ilex latifolia/Lusterleaf Holly | Saltcedar |
| Ilex x Aquipernyi/Perny Holly | Sky rocket juniper |
| Ilex Mary Nell Holly | Strawberry bush |
| Ilex deciduas/Possumhaw Holly | Sweet Bay Magnolia |
| Ilex vomitoria/Weeping yaupon holly | Ternstoemia gymnathera/Cleyera |
| Illicium/ Chinese privet variegated | Viburnum lantana/Wayfaringtree, Viburnum |
| Juniperus/Chinesis 'Hetzi', Hetz Juniper | Viburnum opulus/European, Cranberrybush,
Viburnum |
| Juniperus chinesis/'Pfitzeriana', Pfitzer Juniper | Viburnum plicatum var. Tomentosum/
Doublefile Viburnum |
| Leatherleaf virburnum | Viburnum x pragense/Prague Viburnum |
| Leusothoe populufolia/Fetterbush | Winterberry |
| Ligustrum japonicum/Japanese Privet | |
| Ligustrum lucidum/Waxleaf Privet | |
| Ligustrum sinense/Chinese Privet | |
| Ligustrum x vicaryi/Vicary Golden Privet | |
| Linden vibumvia | |
| Loropetalum | |
| Magnolia stellata/Star magnolia | |

Small Trees (10 to 30 feet in height at maturity)

(Botanical Name / Common Name)

- Acer barbatum/Southern Sugar or Florida Maple
Acer buergerianum/Trident Maple
Acer campestre/Hedge Maple
Acer ginnala/Amur Maple
Acer japonica/Japanese Maple
Acer leucoderme/Chalkbark Maple
Amelanchier/Serviceberry
Prunus mume/Flowering Apricot
Carpinus caroliniana/American Hornbeam
(Ironwood)
Cercis Canadensis/Redbud or Judas Tree
Chinese Flame Tree
Chonanthus virginicus/Fringe Tree or
Grancy Gray-beard
Continus coggygria/Common Smoketree
Cornus florida/Flowering Dogwood
Cornus kousa/Japanese Flowering Dogwood
Crataegus phaenopyrum or Crataegus viridis
'Winter King/Washington Hawthorne
Morus alba 'Chaparral' pendula/
Weeping Mulberry
Elaeagnus angustifolia/Russian Olive
Ostrya virginiana/American Hophornbeam
Oxydendrum arboretum/Sourwood
Pinus thunbergiana/Black Pine
Pissard plum
Pistachio
Prunus caroliniana/Carolina Laurel, Cherry
Cupressus arizonica/Arizona Cypress
Cupressocyparis leylandii/Leyland Cypress
Eriobotrya Japonica/Loquat
Franklinia
Gordonia altamaha/Franklinia
Halesia Carolina/Siverbell
Ilex x attenuate/'Savannah', Savannah Holly
Ilex deciduas/Possumhaw
Ilex latifolia/Lusterleaf Holly
Ilex x 'Nellie R. Stevens Holly
Ilex opaca/American Holly
Koelruteria paniuclata/Goldenraintree
Lagerstroemia indica/Crape Myrtle
Maclura promifera/Osage-orange
Magnolia macrophylla/Bigleaf Magnolia
Magnolia x souldangian/Saucer Magnolia
Magnolia tripetala/Umbrella Magnolia
Malus/hybrids & cultivars Flowering crabapples
Prunus serrulata/ (many cultivars)
Japanese Flowering Cherry
Prunus subhirtella vars. Pendula and autumnalis/
Weeping and Autumn Higan Cherry
Prunus x yedoensis/Yoshino Cherry
Pyrus calleeryana/Callery Pear & cultivars e. g.
Bradford, Aristocrat, Chanticleer & others
Southern blackhaw
Vitex agnus-castus/Chaste tree

Large Trees (at least 30 feet in height at maturity)

(Botanical Name / Common Name)

- Abies firma*/Japanese Fir
Acer rubrum/Red Maple
Acer saccharum/Sugar Maple
Betula nigra/River Birch
Carpinus betulus/European Hornbeam
Carya illinoensis/Pecan
Castanea dentata/American Chestnut
(new resistant variety)
Cedar of Lebanon
Cedrus deodara/Deodar Cedar
Cercidiphyllum japonicum/Katsura Tree
Caldastis lutea/Yellowwood
Corylus colurna/Turkish Filbert
Cunninghamia lanceolata/Common Chinafir
Cupressocyparis leylandii/Leyland Cypress
Empress Tree
Fagus grandifolia/American Beech
Fagus/Copper Beech
Fagus/Weeping Beech
Fraxinus pennsylvanica/White Ash
Fraxinus americana/Green Ash
Ginkgo biloba/Ginkgo or Maiden Tree
Gleditsia triacanthos var. *inermis*/
Thornless Honey Locust
Gymnocladus dioica/Kentucky Coffeetree
Ulmus americana/American Elm "Princeton"
Resistant to elm beetle
Juniperus virginiana/Deodar Cedar
Liriodendron tulipifera/Tuliptree (Yellow Poplar)
Liquidambar styraciflua/American Sweetgum
Magnolia grandiflora/Southern Magnolia
Metasequoia glyptostroboides/Dawn Redwood
Nyssa sylvatica/Blackgum, Tupelo
Phellodendron amurense/Amur Corktree
Pinus nigra/Austrian Pine
Pinus palustris/Longleaf Pine
Pinus taeda/Loblolly Pine
Pinus virginiana/Virginia Pine
Pistachia chinensis/Chinese Pistache
Platanus x acerifolia/London Planetree,
Sycamore
Quercus alba/White Oak
Quercus acutissima/Sawtooth Oak
Quercus coccinea/Scarlet Oak
Quercus falcata/Southern Red Oak
Quercus imbricaria/Shingle Oak
Quercus lyrata/Overcup Oak
Quercus hemisphaerica/Laurel Oak,
Darlington Tree
Quercus laurifolia/Swamp Laurel Oak
Quercus nigra/Water Oak
Quercus nutallii/Pin Oak
Quercus palustris/Pin Oak
Quercus phellos/Willow Oak
Quercus rubra/Northern Red Oak
Quercus shumardii/Shumard Oak
Quercus virginiana/Live Oak
Tilia x euchlora/Crimean or Caucasian Linden
Tilia tomentosa/Silver Linden
Taxodium distichum & *T. ascendens*/
Baldcypress and Pondcypress
Ulmus americana/American Elm
Ulmus parvifolia/True Chinese Elm, Lacebark Elm
Zelkova serrata/Japanese Zelkova

D. Quick View Matrix

	Work Proposed	Routine	Minor	Major
1	Architectural Details - replacement		X	
2	Awnings and Canopies - removal		X	
3	Buildings (accessory) - removal		X	
4	Doors and Windows - Aluminum Storm - removal	X		
5	Doors and Windows - Caulking and Weather Stripping	X		
6	Entrance Markers, fountains and street accessories - repair	X		
7	Extensions to HP Major Work COAs if no change in plan and work has begun		X	
8	Installation and removal of Fences, Walls, Hedges and Screen Plantings		X	
9	Foundation Vents - Metal - installation		X	
10	Gutters and Downspouts, Roof Ventilators on rear slopes and Chimney Caps - installation		X	
11	Landscape - installation of hedges, screen plantings, shrubbery and trees.		X	
12	Landscape - maintenance	X		
13	Landscape - railroad tie or landscape timber removal		X	
14	Landscape - removal of mature or dead/diseased trees		X	
15	Landscape - vegetable/flower gardens	X		
16	Light Fixtures (exterior) - repair	X		
17	Light Fixtures (exterior) - replacement or installation		X	
18	Masonry or Stone - repairs, including repointing	X		
19	Mechanical Equipment - permanent or temporary - installation or repair		X	
20	Painting - previously unpainted masonry			X
21	Painting - siding or trim (different color)		X	
22	Painting - siding or trim (same color)	X		
23	Pavement - marking	X		
24	Pet Enclosures		X	
25	Playground Equipment and Moveable Playhouses		X	
26	Pruning or Trimming of Trees (not topping)	X		
27	Retaining Walls - replacement with like - kind materials		X	
28	Shutters - replacement with like design and materials		X	
29	Siding - removal of vinyl when original is to be repaired and repainted		X	
30	Siding - replacement of original documented siding			X
31	Roof Shingles, Porch Flooring, etc. - repair or replace		X	
32	Storage Buildings - removal of metal building	X		
33	Tank Removal - underground		X	
34	Utility Poles and Wires - installation and maintenance		X	
35	Walks or Steps - removal of cinderblock walks or steps		X	
36	Walks, Patios, Fences, and Driveways - repairs	X		
37	Walkways - replacement with like - kind materials and design		X	
38	Window Glass - replacement or repair	X		
39	Wood foundation/ basement access doors - installation		X	
40	Any repair, replacement, installation or removal not specifically indicated on this matrix			X

CLOSED SESSION

**AN ORDINANCE AMENDING THE ANNUAL OPERATING BUDGET
OF THE CITY OF SANFORD FY 2015-2016**

BE IT ORDAINED by the City Council of the City of Sanford, North Carolina in regular session assembled.

Section 1: The following amounts are hereby amended to ordinance 2015-36 per G. S. 159-15 for the continued operation of the City of Sanford, its government, and activities for the balance of the fiscal year 2015-2016.

**GENERAL FUND
APPROPRIATION OF FUNDS**

REVENUES			EXPENDITURES		
100045 30335	Miscellaneous	1,500	10014200 00000	Administration	1,500
Total Appropriation		<u>\$ 1,500</u>			

Section 2. This ordinance shall be in full force and effective from and after the date of its adoption.

ADOPTED this, the 15th day of December, 2015.

T. Chet Mann, Mayor

ATTEST:

Bonnie Davis, City Clerk

Susan C. Patterson, City Attorney

2015-2016 BUDGET ORDINANCE AMENDMENT

GENERAL FUND

Appropriation of Funds - results in increasing of budget

Revenues

Miscellaneous	1,500	To appropriate additional revenue received for claim settlement
---------------	-------	---

Expenditures

Administration	1,500	To budget additional funds required to hire temporary staff while employee is on leave
----------------	-------	--